

EPSON RC+ 7.0 Option

GUI Builder 7.0

Rev.8

ENM231S5540F

Original instructions

EPSON RC+ 7.0 Option GUI Builder 7.0 Rev.8

EPSON RC+ 7.0 Option

GUI Builder 7.0

Rev.8

FOREWORD

Thank you for purchasing our robot products. This manual contains the information necessary for the correct use of the EPSON RC+ software.

Please carefully read this manual and other related manuals when using this software.

Keep this manual in a handy location for easy access at all times.

The robot system and its optional parts are shipped to our customers only after being subjected to the strictest quality controls, tests, and inspections to certify its compliance with our high performance standards. Please note that the basic performance of the product will not be exhibited if our robot system is used outside of the usage conditions and product specifications described in the manuals.

This manual describes possible dangers and consequences that we can foresee. Be sure to comply with safety precautions on this manual to use our robot system safely and correctly.

TRADEMARKS

Microsoft, Windows, and Windows logo are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. Other brand and product names are trademarks or registered trademarks of the respective holders.

TRADEMARK NOTATION IN THIS MANUAL

Microsoft® Windows® 8 operating system

Microsoft® Windows® 10 operating system

Microsoft® Windows® 11 operating system

Throughout this manual, Windows 8, Windows 10 and Windows 11 refer to above respective operating systems. In some cases, Windows refers generically to Windows 8, Windows 10 and Windows 11.

NOTICE

No part of this manual may be copied or reproduced without authorization.

The contents of this manual are subject to change without notice.

Please notify us if you should find any errors in this manual or if you have any comments regarding its contents.

MANUFACTURER

SEIKO EPSON CORPORATION

CONTACT INFORMATION

Contact information is described in “SUPPLIERS” in the first pages of the following manual:

Robot System Safety Manual Read this manual first

1. Introduction	1
1.1 Features.....	1
2. Installation.....	1
3. Getting Started.....	2
3.1 GUI Builder Tutorial.....	2
4. The GUI Builder Environment	7
4.1 Overview.....	7
4.2 Basic Concepts Required to Understand GUI Builder	7
4.3 Open the GUI Builder Window	8
4.4 Parts of the GUI Builder Window.....	8
4.4.1 Design Area.....	8
4.4.2 Toolbar	9
4.4.3 Forms Explorer.....	10
4.4.4 Property Grid	10
4.4.5 Events Grid.....	10
4.5 Working with Forms and Controls	10
4.5.1 Creating a Form	10
4.5.2 Deleting a Form.....	10
4.5.3 Opening and Closing Forms	11
4.5.4 Changing the Size of a Form	11
4.5.5 Editing Multiple Forms.....	11
4.5.6 Creating Controls	11
4.5.7 Deleting Controls.....	11
4.5.8 Sizing and Moving Controls	12
4.5.9 Copy, Cut, Paste for Controls	12
4.5.10 Editing Properties.....	12
4.5.11 Working with Event Handlers.....	13
4.5.12 Changing Tab Order	14
4.5.13 Saving Your Work	14
4.6 Setting GUI Builder Preferences	15
4.7 Importing forms from other projects	16
5. GUI Builder Components	17
5.1 Form.....	17
5.1.1 Description.....	17
5.1.2 Usage	17
5.1.3 Form Properties.....	18

5.1.4 Form Events	19
5.2 Button Control	19
5.2.1 Description	19
5.2.2 Usage	19
5.2.3 Button Control Properties.....	19
5.2.4 Button Control Events	20
5.3 Label Control	21
5.3.1 Description	21
5.3.2 Usage	21
5.3.3 Label Control Properties	21
5.3.4 Label Control Events.....	22
5.4 TextBox Control.....	23
5.4.1 Description	23
5.4.2 Usage	23
5.4.3 TextBox Control Properties.....	23
5.4.4 TextBox Control Events	24
5.5 RadioButton Control	25
5.5.1 Description	25
5.5.2 Usage	25
5.5.3 RadioButton Control Properties	26
5.5.4 RadioButton Control Events.....	27
5.6 CheckBox Control	27
5.6.1 Description	27
5.6.2 Usage	27
5.6.3 CheckBox Control Properties.....	27
5.6.4 CheckBox Control Events	28
5.7 ListBox Control	29
5.7.1 Description	29
5.7.2 Usage	29
5.7.3 ListBox Control Properties	30
5.7.4 ListBox Control Events.....	30
5.8 ComboBox Control	31
5.8.1 Description	31
5.8.2 Usage	31
5.8.3 ComboBox Control Properties	32
5.8.4 ComboBox Control Events.....	33
5.9 PictureBox Control	33
5.9.1 Description	33
5.9.2 Usage	33
5.9.3 PictureBox Control Properties	33

5.9.4 PictureBox Control Events	34
5.10 GroupBox Control.....	35
5.10.1 Description.....	35
5.10.2 Usage	35
5.10.3 GroupBox Control Properties.....	35
5.10.4 GroupBox Control Events	36
5.11 Timer Control.....	37
5.11.1 Description.....	37
5.11.2 Usage	37
5.11.3 Timer Control Properties	37
5.11.4 Timer Control Events.....	37
5.12 VideoBox Control.....	38
5.12.1 Description.....	38
5.12.2 Usage	38
5.12.3 VideoBox Control Properties.....	38
5.12.4 VideoBox Control Events	39
5.13 LED Control	40
5.13.1 Description.....	40
5.13.2 Usage	40
5.13.3 LED Control Properties	40
5.13.4 LED Control Events.....	41
5.14 StatusBar Control	42
5.14.1 Description	42
5.14.2 Usage	42
5.14.3 StatusBar Control Properties	42
5.14.4 StatusBar Control Events.....	43
5.15 ProgressBar Control.....	44
5.15.1 Description	44
5.15.2 Usage	44
5.15.3 ProgressBar Control Properties.....	44
5.15.4 ProgressBar Control Events.....	45
5.16 TrackBar Control	46
5.16.1 Description	46
5.16.2 Usage	46
5.16.3 TrackBar Control Properties.....	46
5.16.4 TrackBar Control Events	47
5.17 Grid Control	48
5.17.1 Description	48
5.17.2 Usage	48
5.17.3 Grid Control Properties	48

5.17.4 Grid Control Events.....	49
5.17.5 GridEditor	49
6. Operation.....	50
6.1 Overview.....	50
6.2 GUI Development in Program Mode.....	50
6.2.1 Design the GUI.....	50
6.2.2 Debugging.....	51
6.3 Auto Mode	51
6.4 Handling Pause and Continue	52
6.5 Handling Emergency Stop	52
6.6 Using a Help File	52
7. GUI Builder Reference.....	53
7.1 Overview.....	53
7.2 GUI Builder Properties and Events Format Description	53
AcceptButton Property	54
AddItem Property	55
AddRow Property	56
AppendText Property	57
AllowStateChange Property.....	58
BackColor Property	59
BackColorMode Property.....	60
BorderStyle Property.....	61
Camera Property.....	62
CancelButton Property.....	63
CellBackColor Property.....	64
CellChanged Event	65
CellForeColor Property	66
CellText Property	67
Checked Property	68
Click Event	69
Closed Event.....	70
ControlBox Property.....	71
Controls Property	72
Count Property	73
DbClick Event.....	74
DialogResult Property	75
Dock Property.....	76
DropDownStyle Property.....	77

Enabled Property.....	78
EventTaskType Property.....	79
Font Property.....	80
FontBold Property.....	81
FontItalic Property.....	82
FontName Property.....	83
FontSize Property.....	84
ForeColor Property.....	85
FormBorderStyle Property.....	86
GClose Statement.....	87
GGet Statement.....	88
GraphicsEnabled Property.....	89
GridEditor Property.....	90
GSet Statement.....	92
GShow Statement.....	93
GShowDialog Function.....	94
GShowDialog Statement.....	95
Height Property.....	96
HelpButton Property.....	97
HelpID Property.....	98
Image Property.....	99
ImageAlign Property.....	100
ImageOff Property.....	101
ImageOn Property.....	102
Interval Property.....	103
IOBit Property.....	104
IOType Property.....	105
KeyPress Event.....	106
LargeChange Property.....	107
Left Property.....	108
List Property.....	109
ListCount Property.....	110
Load Event.....	111
MaximizeBox Property.....	112
Maximum Property.....	113
MinimizeBox Property.....	114
Minimum Property.....	115
MultiLine Property.....	116
Name Property.....	117
Orientation Property.....	118

PasswordChar Property	119
ProgressBarStyle Property	120
ReadOnly Property.....	121
RemoveRow Property	122
Resize Event	123
RobotNumber Property	124
RowCount Property	125
Scroll Event	126
ScrollBars Property	127
SelectedIndex Property	128
ShowDateTime Property	129
ShowEStop Property	130
ShowPrint Property	131
ShowRobot Property	132
ShowSafeguard Property	133
SizeMode Property.....	134
SmallChange Property	135
Sorted Property	136
StartPosition Property	137
Step Property	138
TabIndex Property.....	139
Text Property.....	140
TextAlign Property.....	141
Tick Event.....	142
TickFrequency Property	143
TickStyle Property	144
ToolTipText Property.....	145
Top Property.....	146
Type Property.....	147
Update Property	148
Value Property.....	149
Variable Property	150
VideoEnabled Property	151
Visible Property	152
Width Property.....	153
WindowState Property	154
WordWrap Property	155

1. Introduction

The EPSON RC+ GUI Builder 7.0 Option enables you create a GUI (Graphical User Interface) for your SPEL+ application. The design goal for GUI Builder was to create an easy to use integrated tool for creating a SPEL+ application GUI in the EPSON RC+ development environment. It is ideal for users that need a simple GUI and do not want to use a third party product such as Visual Studio. Even users that never created a GUI before can easily make one with GUI Builder.



For advanced GUI applications, you may want to consider using the EPSON RC+ 7.0 RC+ API option along with Visual Studio or another tool that can interface with the VB Guide .NET libraries.

1.1 Features

The following features are supported in the GUI Builder 7.0 package:

- Your GUI is integrated completely within the EPSON RC+ environment for easy design, debugging, and display at runtime. No third party tools are required.
- You can create and debug GUI forms in your EPSON RC+ project.
- Several standard controls are provided, including button, label, textbox, etc. In addition, controls are provided for displaying video, variable status, and I/O status.
- Form and control events are executed as SPEL+ tasks. You can specify whether these task run in Normal, NoPause, or NoEmgAbort modes.
- In Auto mode, EPSON RC+ can automatically display your main form at startup, or you can show forms from your SPEL+ code.

2. Installation

Please follow the instructions in this chapter to help ensure proper installation of the GUI Builder 7.0 software.

Before starting, ensure that all Windows applications have been closed.

To install GUI Builder:

1. Install EPSON RC+ 7.0. The GUI Builder option is automatically installed.
2. Ensure that the software key has been enabled for GUI Builder 7.0 in the controller you will be using. Refer to the EPSON RC+ 7.0 User's Guide for information on how to enable options in the controller.

This completes the GUI Builder 7.0 installation.

3. Getting Started

This chapter contains information for getting started with GUI Builder 7.0.

Before continuing, ensure that the GUI Builder option is enabled. See the *Installation* chapter for details.

If you have never used EPSON RC+ before, you should read the EPSON RC+ 7.0 User's Guide to get familiar with creating projects and programs.

The following section presents a tutorial illustrating some simple concepts.

3.1 GUI Builder Tutorial

In this section we will create a simple GUI application that runs a robot cycle.

We will walk through the following tasks:


- Create a new EPSON RC+ project with a function to run the robot cycle.
- Create a form with Start and Stop buttons to run the robot cycle. This shows how to create a form and add buttons with events to start and stop a SPEL+ task.
- Add Pause and Continue buttons to the form. This shows the use of the EventTaskType property.
- Add a setup form. This form will use the Label and TextBox controls to allow the user to change robot speeds.
- Add a button on the main form to display the setup form. This shows the use of the GShowDialog statement and the DialogResult property.

Follow these steps:

- 1 Create a new EPSON RC+ 7.0 project called GUITest.
2. Using the Robot Manager, teach two robot points P0 and P1 in two different positions.
3. Add code to function main in Main.prg as shown below:


```
Function main
  Robot1
  Motor On
  Do
    Go P0
    Wait 0.5
    Go P1
    Wait 0.5
  Loop
End
```

4. Select Tools | GUI Builder to open the GUI Builder window.
5. Click the New Form button on the GUI Builder window toolbar to create a form and name it frmMain. Click the OK button.

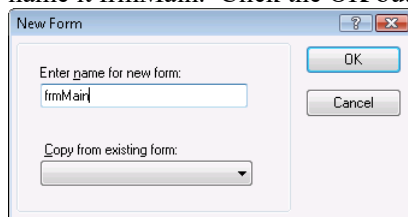


6. Click the New Button button on the GUI Builder window toolbar click the mouse on the form. A new button will be created.


- In the Property Grid, scroll down to the Name property, then change the name to btnStart and press ENTER.

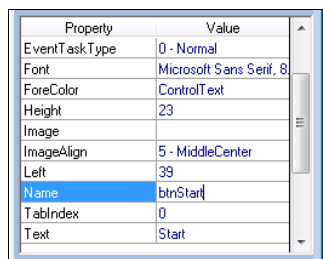

- In the Property Grid, scroll down to the Text property, then change the text from Button1 to Start and press ENTER.

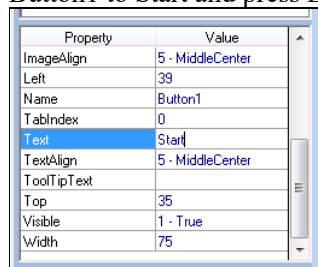

- Double click on the Start button on your form. A new program window named frmMain.prg will be opened with a new function for the button click event handler.

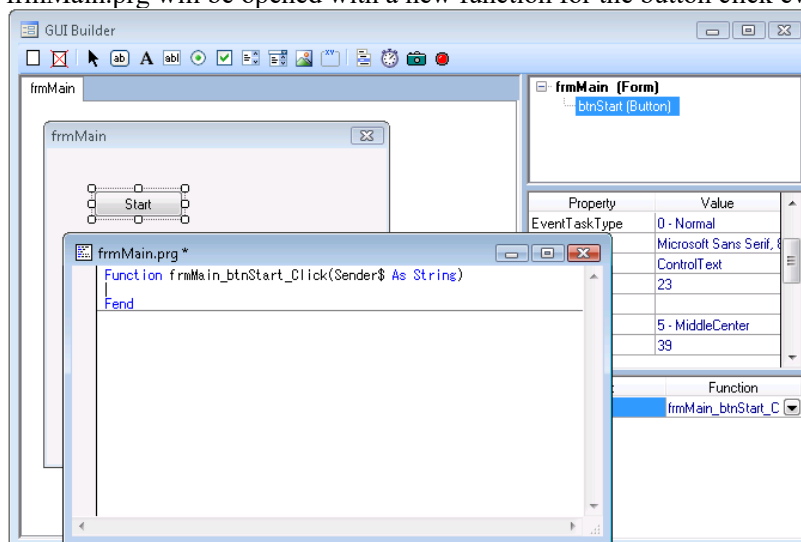


- Change the frmMain_btnStart_Click function to start the main task as shown below. This will cause the main function to start when the user clicks the Start button.

```
Function frmMain_btnStart_Click(Sender$ As String)
    Xqt main
Fend
```

- Click the New Button button on the GUI Builder window toolbar, then click on the form under the Start button to create another button.

12. For the new button, change the Name property to btnStop, and change the Text property to Stop. At this point, your form should look as shown below:

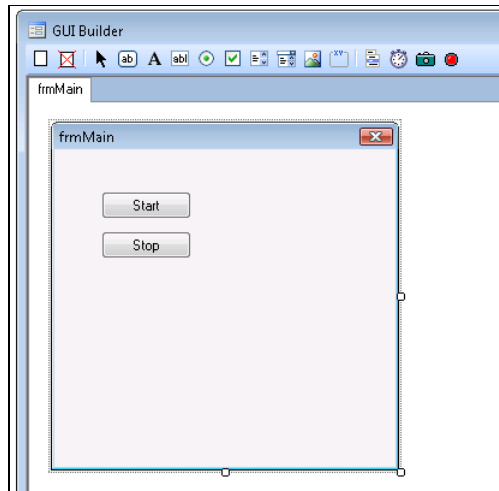

13. Double click the Stop button to create the button click event handler. Then change the code as shown below:

```
Function frmMain_btnStop_Click(Sender$ As String)
    Quit main
End
```

14. Press F5 to build the project and display the Run Window. If any build errors occur, correct your code and press F5 again.
15. Select the Form radio button on the Run Window.
16. Click the Start button on the Run Window.
17. frmMain will be displayed. Click the Start button on frmMain. The robot should now be moving between P0 and P1.
18. Click the Stop button on your form. The robot task will stop.
19. Now click the X button in the upper right of your form. The form will close.

We will now add Pause and Continue buttons to our GUI.

20. Show the GUI Builder window again by clicking on the GUI Builder toolbar button.
21. Click the New Button button on the GUI Builder window toolbar and click the form to the right of the Start button to create a new button.
22. For the new button, change the Name property to btnPause, and change the Text property to Pause.
23. Change the EventTaskType for the Pause button to 1 – NoPause. This allows the button click event handler to execute the Pause statement without pausing the task itself.
24. Double click the Pause button to create an event handler function. Then change the code by adding the Pause statement as shown below:

```
Function frmMain_btnPause_Click(Sender$ As String)
    Pause
End
```

25. Click the New Button button on the GUI Builder window toolbar and click the form to the right of the Stop button to create a new button.
26. For the new button, change the Name property to "btnCont", and change the Text property to "Continue".

27. Change the EventTaskType for the Continue button to 1 – NoPause. This allows the button click event handler to execute the Cont statement when normal tasks are paused.
28. Double click the Continue button to create an event handler function. Then change the code by adding the Cont statement as shown below:

```
Function frmMain_btnCont_Click(Sender$ As String)
    Cont
End
```


29. Press F5 to build the project and open the Run Window. If any build errors occur, correct your code and press F5 again.
30. Click the Start button on the Run Window. Your form will be displayed.
31. Click the Start button on your form. The robot cycle will execute.
32. Click the Pause button on your form. The robot cycle will pause.
33. Click the Continue button on your form. The robot cycle will continue.
34. Click the Stop button on your form, then close the form by clicking the X button in the upper right corner.

We will now add a setup form to our GUI.

35. Click the New Form button the GUI Builder window toolbar and name the new form frmSetup, then click OK. A new tab page will be opened showing the new form.
36. Click the New Label button and click on frmSetup to create a label.
37. In the Property Grid, change the name of the new label to "lblSpeed".
38. Change the Text property to "Speed:".
39. Click the New TextBox button and click on frmSetup to the right of the Speed label.
40. Change the Name property to "txtSpeed" and change the Text property to "10".
41. Double click on frmSetup to create the Load event handler function for the form and change the code as shown below:

```
Function frmSetup_Load(Sender$ As String)
    GSet frmSetup.txtSpeed.Text, Str$(Speed(1))
End
```

42. Click the New Button button on the GUI Builder window toolbar and click the form to add the button. Name this button "btnOK" and set the Text property to "OK".
43. Click the New Button button on the GUI Builder window toolbar and click the form to add the button. Name this button "btnCancel" and set the Text property to "Cancel". At this point, you setup form should look similar to the one shown below:

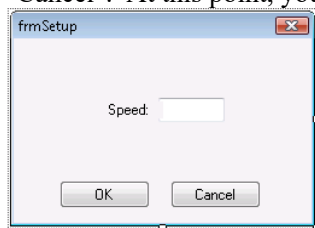

3. Getting Started

44. Double click the OK button to create an event handler function. Then change the code to set the form's DialogResult property and call GClose as shown below:

```
Function frmSetup_btnOK_Click(Sender$ As String)
    GSet frmSetup.DialogResult, DIALOGRESULT_OK
    GClose frmSetup
End
```

45. Double click the Cancel button to create an event handler function. Then change the code to set the form's DialogResult property and call GClose as shown below:

```
Function frmSetup_btnCancel_Click(Sender$ As String)
    GSet frmSetup.DialogResult, DIALOGRESULT_CANCEL
    GClose frmSetup
End
```

46. Click the frmMain tab to work with frmMain again.
47. Click the New Button button on the GUI Builder window toolbar and click the form to add the button. Name this button "btnSetup" and set the Text property to "Setup".
48. Double click the Setup button to create an event handler function. Then change the code to show the setup dialog and set the new robot speed as shown below:

```
Function frmMain_btnSetup_Click(Sender$ As String)
    Integer result
    String value$

    result = GShowDialog(frmSetup)
    If result = DIALOGRESULT_OK Then
        GGet frmSetup.txtSpeed.Text, value$
        Speed Val(value$)
    EndIf
End
```

49. Press F5 to build the project and open the Run Window.
50. Click the Start button on the Run Window. The main form will be displayed.
51. Click the Setup button on the main form. The setup dialog will be displayed with the current robot speed in the textbox.
52. Enter a new speed and click OK.
53. Click the Start button on the main form to run the robot cycle at the new speed. If the Stop button is clicked and the robot stops, the motion speed will be reset to the default.
54. This completes the tutorial.

4. The GUI Builder Environment

4.1 Overview

In this chapter we will focus on some concepts and definitions so you can gain a complete understanding of GUI Builder and its components. We will cover the following topics:

- Basic concepts which you should understand to use GUI Builder
- How to open the GUI Builder window
- Parts of the GUI Builder window
- How to work with forms and controls
- Setting GUI Builder preferences

4.2 Basic Concepts Required to Understand GUI Builder

A quick explanation of some of the basic concepts will help you understand this chapter much better. Please review the concepts described below before proceeding through the rest of this chapter.

What is a GUI?

GUI stands for **G**raphical **U**ser **I**nterface. A GUI allows your operators to easily interact with your SPEL+ application to run cycles or perform setup functions. The basic building block for your GUI is the Form.

What is a Form?

A form is a window or dialog box that contains controls. It is the basic unit of your GUI application. When a form is displayed at runtime, the controls on the form are active and ready to receive keyboard and mouse events from the user. Your GUI project can have just one form or several forms.

What is a Control?


Controls are objects that are contained within a form, such as buttons, checkboxes, textboxes, etc. Each type of control has its own set of properties and events.

What is an Event?

An event is a SPEL+ function created by you that is called by the GUI when a form or control event occurs. For example, when the user clicks a button control, the button click event can call the SPEL+ function that you designated to run when the click occurs.

4.3 Open the GUI Builder Window

The GUI Builder window is opened from within the EPSON RC+ development environment. After EPSON RC+ has been started, the GUI Builder window can be opened in 2 different ways:


From the main Toolbar: From the main toolbar in EPSON RC+ you should see the GUI Builder icon . Clicking on the GUI Builder icon will open the GUI Builder window.

From the Tools menu: Selecting GUI Builder from the Tools menu will open the GUI Builder window.

Once the GUI Builder window is open you can now begin using GUI Builder to design your GUI application. The next few pages describe the basic parts of the GUI Builder window.

4.4 Parts of the GUI Builder Window

The GUI Builder window is shown below. Each of the indicated parts are described in the following sections.

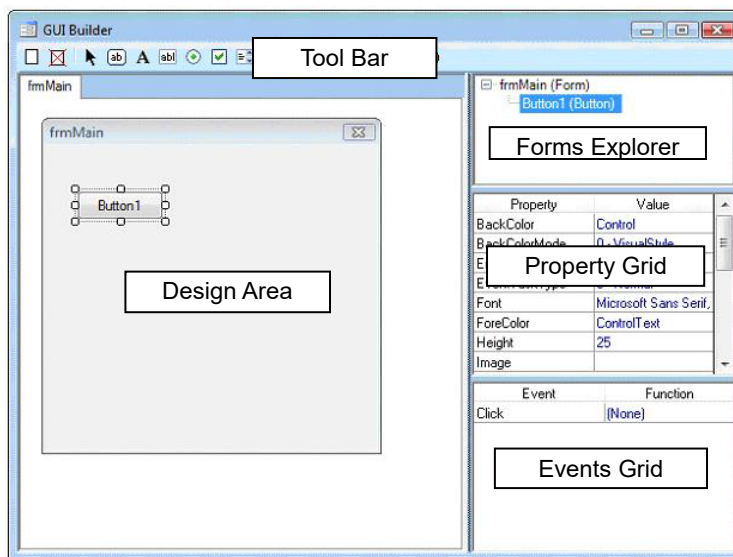


4.4.1 Design Area

This is where your forms are displayed at design time. Each opened form is displayed on its own tab. You can easily switch between forms by clicking on the associated tab or by double clicking the form in the Forms Explorer. If a form is larger than the design area, then scroll bars will be displayed and you can scroll to access all areas of the form.

4.4.2 Toolbar

The toolbar contains buttons for creating forms and controls. The GUI Builder toolbar is located at the top of the GUI Builder window just below the title bar and appears as follows:



The GUI Builder Toolbar

Shown below are general descriptions for each of the GUI Builder toolbar buttons.

Button	Description
	New form: Creates a new form. A dialog pops up and the user is asked to enter the name for the new form.
	Delete Form: Deletes a form in the current project. This button is dimmed if there are no forms for the current project.
	Pointer: Click this button to abort the addition of a new control.
	New Button: Creates a new button control.
	New Label: Creates a new label control used to display static text.
	New TextBox: Creates a new textbox control that allows operators to input text.
	New RadioButton: Creates a new radio button control.
	New CheckBox: Creates a new checkbox control
	New ListBox: Creates a new listbox control.
	New ComboBox: Creates a new combobox control.
	New Grid: Creates a new grid control.
	New PictureBox: Creates a new picturebox.
	New GroupBox: Creates a new groupbox control.
	New StatusBar: Creates a new status bar control.
	New ProgressBar: Creates a new progress bar control.
	New TrackBar: Creates a new track bar control.
	New Timer: Creates a new timer control.
	New VideoBox: Creates a new videobox control. This control allows you to display video for Vision Guide operations.
	New LED: Creates a new LED control. This control allows you to display I/O status. You can optionally allow the operator to double click on the control to change output status. The control can use built-in pictures with various colors, or you can use your own images for off and on status.



4.4.3 Forms Explorer

The Forms Explorer is a tree that contains each form for the current project and its associated controls. When a new form or control is created, it is added to the tree.

Double-clicking on a form opens the form in its own tab in the design area. The properties and events for the form are displayed. Right click on a form to open a menu to set the start form, delete the form, or close it.

Clicking on a control in the tree activates its associated form and sets the current design focus on the control. The properties and events for the control are then displayed

4.4.4 Property Grid

The Property Grid is used to display and edit form and control properties. When you select a form or control, the associated properties are displayed in the grid. There are two columns: Property and Value. Property is the name of the property. Value is the current value that you can edit.

4.4.5 Events Grid


The Events Grid is used to display and change the events for the associated form or control. Each event has a user function that is called when the event occurs.

4.5 Working with Forms and Controls

4.5.1 Creating a Form

To create a form:

1. Open the GUI Builder window.
2. Click on the New Form button on the toolbar.

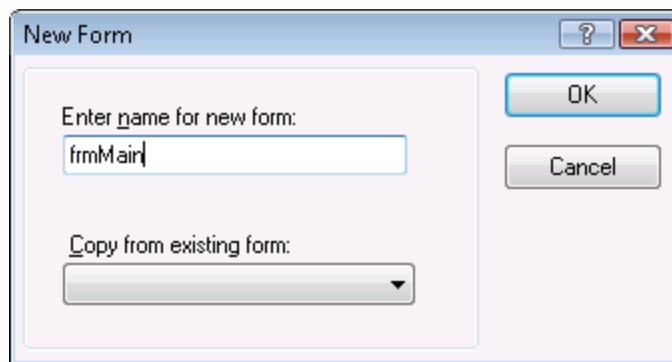

3. Type a name for the form. You may want to use a name starting with "frm" as the prefix. From the New Form dialog, you can optionally copy another form by selecting it from the Copy from existing form list.

4.5.2 Deleting a Form

To delete a form, right click on the form in the Forms Explorer, then select Delete. A confirmation message will be displayed. Click Yes to delete the form. Also, you can use the following methods.

- Click on the <Delete Form> button on the tool bar
- Right click on the form tab, then select Delete.

4.5.3 Opening and Closing Forms

To open a form, double click on the form in the Forms Explorer.

To close a form, right click on the form in Forms Explorer and select Close, or right click on the form tab and select Close.


4.5.4 Changing the Size of a Form

You can change the size of a form using two methods:

- Use the mouse to drag one of the form size handles in the GUI Builder window design area.
- Change the Height and Width properties in the Property Grid at design time or using GSet at runtime.

4.5.5 Editing Multiple Forms

The GUI Builder window allows you to work with multiple forms using a tab interface. You can switch between currently open forms by click on the corresponding tab.

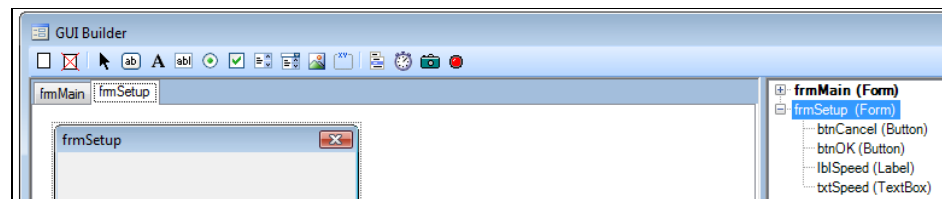

You can copy controls from one form and paste them in another form.

4.5.6 Creating Controls

To create a control

1. Open the form to which you want to add a control.
2. Click on the control button on the GUI Builder window toolbar. A cross cursor will be displayed.
3. You can simply click on the form near the location where you want the control and the control will be created with the default size. Or, you can use the mouse to draw an outline of the control size on the form and release the mouse to create the control using the size of the outline.

4.5.7 Deleting Controls

To delete a control


1. Open the form from which you want to delete one or more controls.
2. Click on the control you want to delete. To select more controls, hold down the Ctrl or Shift key and click on each additional control.
3. Press the Del key on the keyboard. The controls will be deleted.

4.5.8 Sizing and Moving Controls

To change the size of a control

- Use the mouse to drag one of the control's size handles in the GUI Builder window design area.
- Change the Height and Width properties in the Property Grid at design time or using GSet at runtime.

To move a control

- Click the control to activate it, then release the mouse. A move cursor  is now displayed when the mouse is over the control. Click and drag the control to its new position.
- Change the Left and Top properties in the Property Grid at design time, or use GSet at runtime to change the Left and Top properties.

4.5.9 Copy, Cut, Paste for Controls

Selecting controls for copy or cut

First, click on one control. To select more controls, hold down the Ctrl or Shift key and click on each additional control. The selected controls are indicated by white (first control) and black size handles.

Copy selected controls

To copy the selected controls, type Ctrl+C, or click the Copy button on the main toolbar, or select Copy from the Edit menu.

Cut selected controls

To cut the selected controls, type Ctrl+X, or click the Cut button on the main toolbar, or select Cut from the Edit menu.

Pasting controls

To paste controls that have been copied or cut, type Ctrl+V, or click the Paste button on the main toolbar, or select Paste from the Edit menu.

4.5.10 Editing Properties

To edit properties, first click on the form or control to display the associated properties in the Property Grid.

For properties that require text input

Click on the property to change in the Property Grid. Then type in the new value and press Enter or select another property row to apply the change.

For properties that provide a dropdown list of values

Click on the property to change in the Property Grid. Click the down arrow button on the right side of the value. Select the new value from the dropdown list. The change is applied after you make the selection.

For properties that provide a button for selecting values

Click on the property to change in the Property Grid. Click the ellipses button on the right side of the value. Select the new value(s) from the dialog. The change is applied after you make the selection or click OK on the dialog.

4.5.11 Working with Event Handlers

Event handlers are SPEL+ functions with the correct parameters for the specified event. Event handler functions can be in any SPEL+ program file in the current project. By default, event handlers are created in a program file that is created for a form. For example, when you create an event handler for a Button control Click event, a form program file is created first if it does not already exist, then the function is added to the file.


To create an event handler

There are three ways to create an event handler

- Double click on the form or control to create the default event handler. For example, if you double click on a Button control, the Click event handler function is created.
- In the Events grid, double click on the event name.
- In the Events grid, select a function that already exists in the project in the value dropdown list for the event. Only functions with the correct parameters are shown in the list.


To change an event handler

You can change the event handler function by selecting another function in the event value dropdown list.

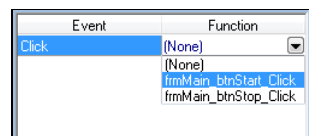

To disable an event handler

Sometimes after creating an event handler, you may decide that it is no longer needed. To disable the event handler, select (None) in the event value dropdown list. The associated function is not deleted. But it will not be called when the event occurs.

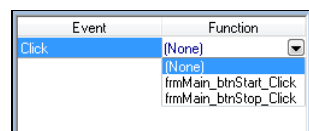

Using EventTaskType

When an event occurs, the event handler function is started as a SPEL+ task.

The EventTaskType property lets you specify which type of task will be executed. This is important for events that need to execute in a pause condition or emergency stop condition.


For example, if a button click event handler will execute Pause or Cont, the EventTaskType must be set to 1 – NoPause. Or if an event handler must execute Reset during an emergency stop condition, then the EventTaskType must be set to 2 – NoEmgAbort.

4.5.12 Changing Tab Order

After adding controls to a form, you may want to change the tab order. This is the order that focus is set when the user types Tab at runtime. It is also important to set the tab order of labels using hotkeys to be one tab index before the control that is being labeled.

To change tab order

1. Open the form for which you want to change the tab order.
2. Type the Tab key. The tab order will be displayed as shown below:

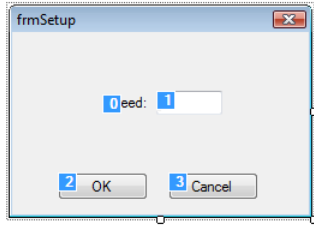

3. Click on each tab order value in the order you want.
4. Type the Tab key again to hide the tab order.

4.5.13 Saving Your Work


After making changes in the GUI Builder window, you can save your work using two methods:

- From the File menu, select Save, or type Ctrl+S.
- Click the Project Save toolbar button on the EPSON RC+ main toolbar.


4.6 Setting GUI Builder Preferences

You can change how controls are managed on the forms in the GUI Builder window design area by setting the GUI Builder preferences.


Select the Setup menu | Preferences | GUI Builder.

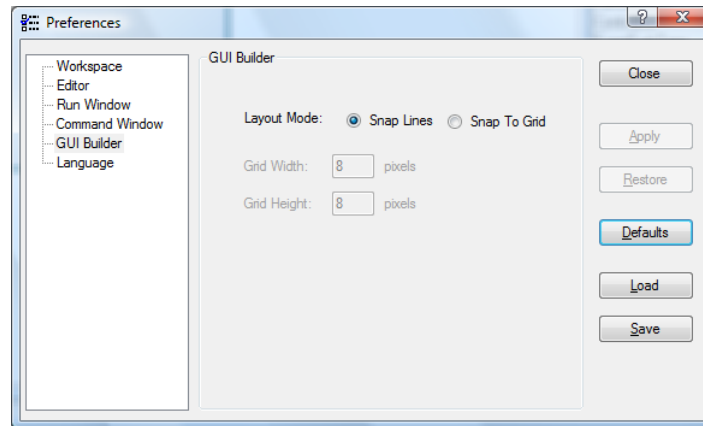

When the Layout Mode is set to Snap Lines, GUI Builder shows line segments around the controls as you move them around the form.

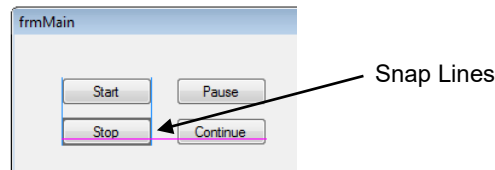

When Layout Mode is set to Snap To Grid, a grid is displayed on each form, and when you move a control on the form, it snaps to each grid location.

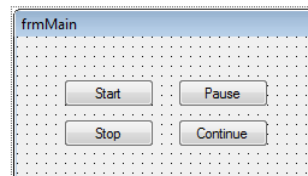


To change the size of the grid, change the Grid Width and Grid Height values and click Apply.

When you change GUI Builder preferences and click Apply, if the GUI Builder window is open, the current changes will be saved and the window will be re-opened to use the new preferences.


4.7 Importing forms from other projects

You can import GUI Builder forms from other projects using the File | Import menu.

1. Select File | Import.
2. Navigate to the desired project folder to import from and select the GUI Builder file type.

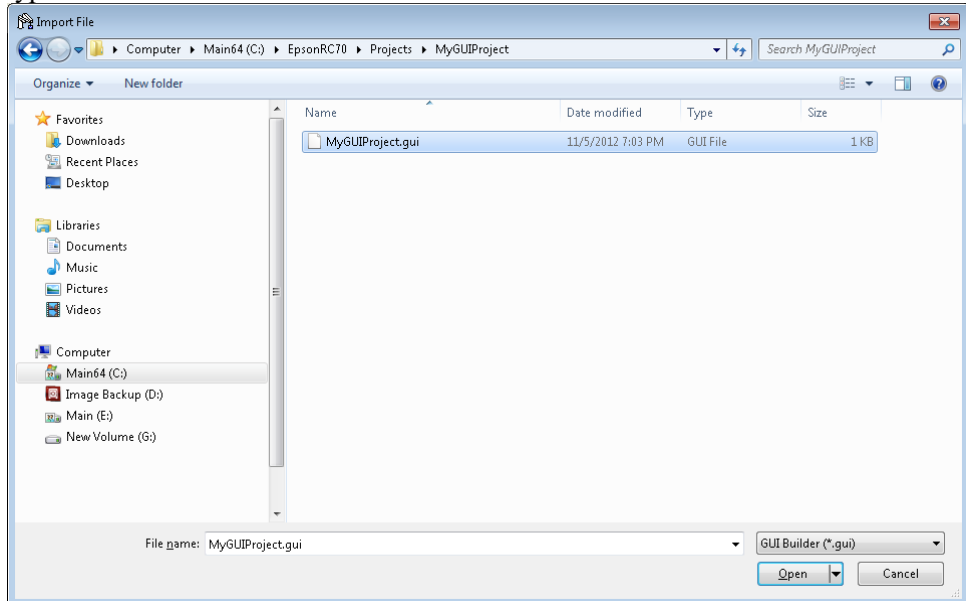

3. Select the GUI file name and click Open.
4. A dialog will appear that has a list of forms in the project you are importing from.

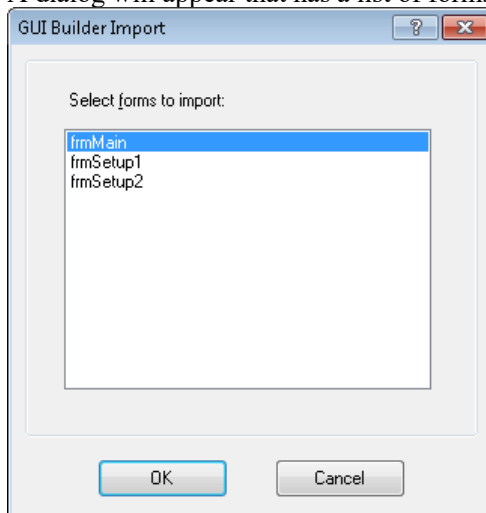

5. Select one or more forms you want to import, then click OK.
6. The selected forms will be added to the current project. If a form already existed, you will be prompted whether to overwrite it or not.

5. GUI Builder Components


This chapter describes the Form and all of the controls that can be used on a Form. Each component section has information on usage and all properties and events associated with the component.

For more details on properties, events, and statements, refer to the GUI Builder Reference chapter.

5.1 Form

5.1.1 Description

The Form is the basic building block of your GUI application. It allows you to display a window or dialog box with controls for user interaction. Your GUI application can have one form or many forms.

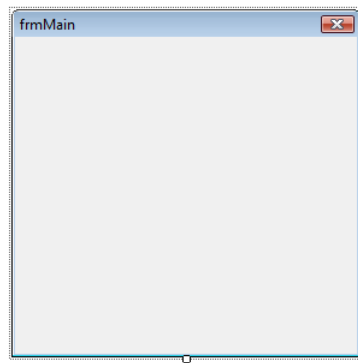


5.1.2 Usage

Displaying a form

A Form can be displayed in three ways:

1. If the Form is set as the startup form, then in auto mode when the system starts, it is displayed automatically. To set the startup form, right click on the form in the Forms Explorer, then select Startup Form, as shown below:

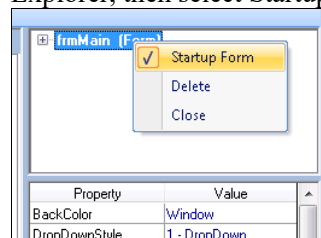

A form is shown in bold to indicate it is the startup form. You can also set the startup form for your project from Project | Properties | GUI Builder.

2. Using the `GShowDialog` function. This displays the form as a dialog box and returns the `DialogResult` value.

```
result = GShowDialog (frmSetSpeed)
```

Typically, the `DialogResult` value is set by buttons on the form, such as an OK button and a Cancel button.

3. Using the `GShow` statement. This displays the form as a window.

```
GShow frmIODiags
```

Setting Form Appearance

Set the `FormBorderStyle` property. For forms used as dialogs, you should use 3 – `FixedDialog`.

Set `ControlBox`, `MaximizeBox`, `MinimizeBox` to configure the form's title bar.

Set the `WindowState` to show the form as Normal size, Maximized, or Minimized when it is displayed.

Using Help

You can display help topics from your own help file by setting the `HelpButton` property to `True` and the `HelpID` property to a topic ID in the help file.

For the details, refer to *6.6 Using a Help File*.

5.1.3 Form Properties

Property	Description
AcceptButton	Sets the button control whose click event executes when the user types Enter. Default: None
BackColor	Sets the background color for the form. Default: Control
CancelButton	Sets the button control whose click event executes when the user types Esc. After executed, the form closes. Default: None
ControlBox	Sets whether the title bar control box items are displayed. Default: 1 – True
Controls	Array of controls on the form.
Count	Gets the number of controls in the Controls array.
Dialog Result	Sets the return value when the form is closed (runtime only).
EventTaskType	Sets the type of task used for events. Default: 0 – Normal
FormBorderStyle	Sets the style of the border used for the form. Default: 3 – FixedDialog
Height	Sets the height of the control in pixels.
HelpButton	Sets whether the title bar help button is displayed. Default: 0 – False
HelpID	Sets the ID for the help topic that is displayed when the user clicks the title bar help button Default: 0
Left	Sets the left coordinate of the form in pixels.
MaximizeBox	Sets whether the title bar maximize button is displayed. Default: 0 – False
MinimizeBox	Sets whether the title bar minimize button is displayed. Default: 0 – False
Name	Sets the name of the control.
StartPosition	Sets the start position of the form. Default: 1 - CenterScreen

Property	Description
Text	Used to set the text of the control. Default: Name of form
Top	Gets or sets the top coordinate of the form in pixels.
Type	Gets the type name of the control.
Width	Sets the width of the form in pixels.
WindowState	Sets the default window state for the form. Default: 0 - Normal

5.1.4 Form Events

Event	Description
Closed	Executes after the form is closed.
Load	Executes when the form loads.
Resize	Executes when the form is resized.

5.2 Button Control

5.2.1 Description

The Button control allows the user to click it to perform an action. The Button control can display both text and images. When the button is clicked, it looks as if it is being pushed in and released.



5.2.2 Usage

Button controls allow the operator to initiate some action by clicking with the mouse.

You can change the look of a button using several properties, such as ForeColor (used for the button text), BackColor, Font, TextAlign, Image, and ImageAlign.

You must provide a click event function to determine whether the operator clicked the button, and then take some action in the event handler.

5.2.3 Button Control Properties

Property	Description
BackColor	The background color for the control. Default: Control
BackColorMode	The background color mode for the control. Default: 0 – Visual Style
Enabled	Sets whether the control is enabled at runtime. Default: 1 – True
EventTaskType	The type of task used for events. Default: 0 – Normal
Font	The font for the control text (design time only). Default: Microsoft Sans Serif 8.25 pt
FontBold	The bold attribute for the current font (runtime only). Default: 0 - False

Property	Description
FontItalic	The italic attribute for the current font (runtime only). Default: 0 - False
FontName	The name for the current font (runtime only). Default: Microsoft Sans Serif
FontSize	The size for the current font in points (runtime only). Default: 8.25
ForeColor	The foreground color for the control text. Default: ControlText
Height	The height of the control in pixels.
Image	The picture for the control. To delete, press the <Delete> key. Default: Empty
ImageAlign	The picture alignment for the control. Default: 5 – MiddleCenter
Left	The left coordinate of the control in pixels.
Name	The name of the control. Default: ButtonXX
TabIndex	The tab index of the control.
Text	The text of the control. Default: Name of control
TextAlign	Selects the text alignment. Default: 5 – MiddleCenter
ToolTipText	The text used in the control's tooltip. Default: Empty
Top	The top coordinate of the control in pixels.
Visible	Whether the control is visible or not at runtime. Default: 1 – True
Width	The width of the control in pixels.

5.2.4 Button Control Events

Event	Description
Click	Executes when the user clicks the control with the mouse.

5.3 Label Control

5.3.1 Description


Label controls are used to display text or images that cannot be edited by the user. They are used to identify objects on a form to provide a description of what a certain control will do if clicked, for example, or to display information in response to a run-time event or process in your application. Because the Label control cannot receive focus, it can also be used to create access keys for other controls.



5.3.2 Usage

Use the Label control to display static text on your form.

Typically, label controls are used to provide a text label for another control. For example, if you have a ListBox control on a form, you can put a Label control above the listbox with the name of the list. In the example below, a label with the Text property set to "Part Numbers:" is used to label a list box.



Setting Label Appearance

Use the BorderStyle, ForeColor, BackColor, Font, Image, ImageAlign, and TextAlign properties to change the appearance of the label.

Using hotkeys (mnemonics)

You can designate a character in the label's Text property to be a hotkey. In the Text property of the label, use the ampersand character (&) before the hotkey. For example, in the example shown above, the Text property for the label is "Part &Numbers:".

At runtime, when the user types Alt+N, the focus will go to the listbox.

When using hotkeys, be sure that the tab order is set so that the label's TabIndex is one before the control's TabIndex that is labeled. See the section *Changing Tab Order*.

5.3.3 Label Control Properties

Property	Description
BackColor	The background color for the control. Default: Control
BorderStyle	The border used for the control. Default: 0 – None
Enabled	Sets whether the control is enabled at runtime. Default: 1 – True
EventTaskType	The type of task used for events. Default: 0 – Normal
Font	The font for the control text (design time only). Default: Microsoft Sans Serif 8.25 pt

Property	Description
FontBold	The bold attribute for the current font (runtime only). Default: 0 – False
FontItalic	The italic attribute for the current font (runtime only). Default: 0 – False
FontName	The name for the current font (runtime only). Default: Microsoft Sans Serif
FontSize	The size for the current font in points (runtime only). Default: 8.25
ForeColor	The foreground color for the control text. Default: ControlText
Height	The height of the control in pixels.
Image	The picture for the control. To delete, press the <Delete> key. Default: Empty
ImageAlign	The picture alignment for the control. Default: 5 – MiddleCenter
Left	The left coordinate of the control in pixels.
Name	The name of the control. Default: LabelXX
TabIndex	The tab index of the control.
Text	The text of the control. Default: Name of control
TextAlign	Selects the text alignment. Default: 1 – TopLeft
ToolTipText	The text used in the control's tooltip. Default: Empty
Top	The top coordinate of the control in pixels.
Visible	Whether the control is visible or not at runtime. Default: 1 – True
Width	The width of the control in pixels.

5.3.4 Label Control Events

Event	Description
Click	Executes when the user clicks the control with the mouse.
DbClick	Executes when the user double clicks the control with the mouse.

5.4 TextBox Control

5.4.1 Description

Text boxes are used to get input from the operator or to display text. The TextBox control is generally used for editable text, although it can also be made read-only. Text boxes can display multiple lines, and wrap text to the size of the control. The TextBox control allows a single format for text displayed or entered in the control.



5.4.2 Usage

A TextBox can be used in single line mode or multiline mode.

Single line textbox

By default, when a TextBox is created, it is in single line mode. You can only change the width of the control. The user can only type in one line of characters.

Multiline textbox

To use multiline mode, set the Multiline property to True. In this mode, you can change the height and width of the control. You can display scrollbars by setting the Scrollbars property.

Setting TextBox Appearance

Use the BorderStyle, ForeColor, BackColor, Font, and TextAlign properties to change the appearance of the textbox.

Displaying SPEL+ Global Variable Status

You can display the value of a SPEL+ global variable automatically by setting the Variable property.

NOTE

If the SPEL+ global variable is not displayed by the setting of Variable property, rebuild the project.

5.4.3 TextBox Control Properties

Property	Description
AppendText	Append text at runtime.
BackColor	The background color for the control. Default: Window
BorderStyle	The border used for the control. Default: 2 – Fixed3D
Enabled	Sets whether the control is enabled at runtime. Default: 1 – True
EventTaskType	The type of task used for events. Default: 0 – Normal
Font	The font for the control text (design time only). Default: Microsoft Sans Serif 8.25 pt
FontBold	The bold attribute for the current font (runtime only). Default: 0 – False
FontItalic	The italic attribute for the current font (runtime only). Default: 0 – False

Property	Description
FontName	The name for the current font (runtime only). Default: Microsoft Sans Serif
FontSize	The size for the current font in points (runtime only). Default: 8.25
ForeColor	The foreground color for the control text. Default: WindowText
Height	The height of the control in pixels.
Left	The left coordinate of the control in pixels.
Multiline	Sets whether to display one line or multiple lines. Default: 0 - False
Name	The name of the control. Default: TextBoxXX
PasswordChar	Sets the character used to hide each character that is entered. Default: Empty
ReadOnly	Sets whether the user can edit text or not. Default: 0 - False
ScrollBars	Sets how to display the scrollbars for the control. Default: 0 - None
ShowPrint	Sets whether to display output from Print statements or not. Default: 0 - False
TabIndex	The tab index of the control.
Text	The text of the control. Default: Empty
TextAlign	Selects the text alignment. Default: 1 – Left
ToolTipText	The text used in the control's tooltip. Default: Empty
Top	The top coordinate of the control in pixels.
Update	Updates the display of textbox control (runtime only).
Variable	This is an optional SPEL ⁺ global variable. Default: None
Visible	Whether the control is visible or not at runtime. Default: 1 – True
Width	The width of the control in pixels.
WordWrap	Sets whether to wrap words or not. Default: 1 – True


5.4.4 TextBox Control Events

Event	Description
KeyPress	This event occurs when the control has focus and a key is pressed.

5.5 RadioButton Control


5.5.1 Description

RadioButton controls present a set of two or more mutually exclusive choices to the operator. While radio buttons and check boxes may appear to function similarly, there is an important difference: when a user selects a radio button, the other radio buttons in the same group cannot be selected as well.



5.5.2 Usage

RadioButton controls should be grouped together in a GroupBox control. Each time the operator clicks on one of the radiobuttons in a group, the other buttons are deselected.



Use the Click event to determine if the operator clicked the radiobutton. Use the Checked property to determine if the user checked the box.

In some cases, it may be convenient to use one click event handler for all radiobuttons in a group. You can use the Sender\$ parameter to determine which radiobutton was clicked. Sender\$ is the name of the control that sent the event.

```
Function frmSetup_OptionsClick(Sender$ As String)
    Boolean checked
    GGet frmSetup.Sender$.Checked, checked
    If checked Then
        Select Sender$
            Case "RadioButton1":
                g_Option1 = True
            Case "RadioButton2":
                g_Option2 = True
        Send
    EndIf
End
```

Setting RadioButton Appearance

Use the BorderStyle, ForeColor, BackColor, Font, Image, ImageAlign, and TextAlign properties to change the appearance of the radiobutton.

5.5.3 RadioButton Control Properties

Property	Description
BackColor	The background color for the control. Default: Control
Checked	Sets whether the control is selected at runtime. Default: 0 – False
Enabled	Sets whether the control is enabled at runtime. Default: 1 – True
EventTaskType	The type of task used for events. Default: 0 – Normal
Font	The font for the control text (design time only). Default: Microsoft Sans Serif 8.25 pt
FontBold	The bold attribute for the current font (runtime only). Default: 0 – False
FontItalic	The italic attribute for the current font (runtime only). Default: 0 – False
FontName	The name for the current font (runtime only). Default: Microsoft Sans Serif
FontSize	The size for the current font in points (runtime only). Default: 8.25
ForeColor	The foreground color for the control text. Default: ControlText
Height	The height of the control in pixels.
Image	The picture for the control. To delete, press the <Delete> key. Default: Empty
ImageAlign	The picture alignment for the control. Default: 5 – MiddleCenter
Left	The left coordinate of the control in pixels.
Name	The name of the control. Default: RadioButtonXX
TabIndex	The tab index of the control.
Text	The text of the control. Default: Name of control
TextAlign	Selects the text alignment. Default: 4 – Middle Left
ToolTipText	The text used in the control's tooltip. Default: Empty
Top	The top coordinate of the control in pixels.
Visible	Whether the control is visible or not at runtime. Default: 1 – True
Width	The width of the control in pixels.


5.5.4 RadioButton Control Events

Event	Description
Click	Executes when the user clicks the control with the mouse.

5.6 CheckBox Control

5.6.1 Description


The CheckBox control indicates whether a particular condition is on or off. It is commonly used to present a Yes/No or True/False selection to the user. You can use check box controls in groups to display multiple choices from which the user can select one or more. It is similar to the RadioButton control, but any number of grouped CheckBox controls may be selected.



5.6.2 Usage

Use checkboxes to allow the operator to turn application preferences on or off.

Typically, you would add the checkboxes to a GroupBox control. Use the Checked property to determine if the user checked the box.



Setting CheckBox Appearance

Use the BorderStyle, ForeColor, BackColor, Font, Image, ImageAlign, and TextAlign properties to change the appearance of the checkbox.

5.6.3 CheckBox Control Properties

Property	Description
BackColor	The background color for the control. Default: Control
Checked	Sets whether the control is checked at runtime. Default: 0 – False
Enabled	Sets whether the control is enabled at runtime. Default: 1 – True
EventTaskType	The type of task used for events. Default: 0 – Normal
Font	The font for the control text (design time only). Default: Microsoft Sans Serif 8.25 pt
FontBold	The bold attribute for the current font (runtime only). Default: 0 – False
FontItalic	The italic attribute for the current font (runtime only). Default: 0 – False

Property	Description
FontName	The name for the current font (runtime only). Default: Microsoft Sans Serif
FontSize	The size for the current font in points (runtime only). Default: 8.25
ForeColor	The foreground color for the control text. Default: ControlText
Height	The height of the control in pixels.
Image	The picture for the control. To delete, press the <Delete> key. Default: Empty
ImageAlign	The picture alignment for the control. Default: 5 – MiddleCenter
Left	The left coordinate of the control in pixels.
Name	The name of the control. Default: CheckBoxXX
TabIndex	The tab index of the control.
Text	The text of the control. Default: Name of control
TextAlign	Selects the text alignment. Default: :4 – MiddleLeft
ToolTipText	The text used in the control's tooltip. Default: Empty
Top	The top coordinate of the control in pixels.
Visible	Whether the control is visible or not at runtime. Default: 1 – True
Width	The width of the control in pixels.


5.6.4 CheckBox Control Events

Event	Description
Click	Executes when the user clicks the control with the mouse.

5.7 ListBox Control

5.7.1 Description

A ListBox control displays a list of items from which the operator can select one or more.



5.7.2 Usage

Use the ListBox control to display a static list of items from which the operator can choose.

To add items to a list box

Use the AddItem property at runtime to add items to a listbox. This is normally done in the form load event.

```
GSet frmSetup.lstModels.AddItem, "Model1"
```

```
GSet frmSetup.lstModels.AddItem, "Model2"
```

```
GSet frmSetup.lstModels.AddItem, "Model3"
```

Optionally, you can have the list sorted by set the Sorted property to True.

To determine which item was selected

Use the SelectedIndex property to determine the user selection. If no item has been selected, then SelectedIndex is -1.

```
Integer index
```

```
GGet frmSetup.lstModels.SelectedIndex, index
```

The List array

You can access all of the items in a list using the List array property.

```
Integer i, count
```

```
String item$
```

```
GGet frmSetup.lstModels.ListCount, count
```

```
For i = 0 To count - 1
```

```
    GGet frmSetup.lstModels.List(i), item$
```

```
Next i
```

You can delete an item by setting the List property to an empty string.

```
GSet frmSetup.lstModels.List(0), ""
```

Setting ListBox Appearance

Use the BorderStyle, ForeColor, BackColor, Font, properties to change the appearance of the listbox.

5.7.3 ListBox Control Properties

Property	Description
AddItem	Adds an item to the list at runtime.
BackColor	The background color for the control. Default: Window
BorderStyle	The border used for the control. Default: 2 – Fixed3D
Enabled	Sets whether the control is enabled at runtime. Default: 1 – True
EventTaskType	The type of task used for events. Default: 0 – Normal
Font	The font for the control text (design time only). Default: Microsoft Sans Serif 8.25 pt
FontBold	The bold attribute for the current font (runtime only). Default: 0 – False
FontItalic	The italic attribute for the current font (runtime only). Default: 0 – False
FontName	The name for the current font (runtime only). Default: Microsoft Sans Serif
FontSize	The size for the current font in points (runtime only). Default: 8.25
ForeColor	The foreground color for the control text. Default: WindowText
Height	The height of the control in pixels.
Left	The left coordinate of the control in pixels.
List	Use to access the items in the list at runtime.
ListCount	Use to get the number of items in the list at runtime.
Name	The name of the control. Default: ListBoxXX
SelectedIndex	Use to determine which item has been selected by the operator at runtime.
Sorted	Sets whether to sort the items in the list or not. Default: 0 – False
TabIndex	The tab index of the control.
ToolTipText	The text used in the control's tooltip. Default: Empty
Top	The top coordinate of the control in pixels.
Visible	Whether the control is visible or not at runtime. Default: 1 – True
Width	The width of the control in pixels.

5.7.4 ListBox Control Events

Event	Description
Click	Executes when the user clicks the control with the mouse.
DbClick	Executes when the user double clicks the control with the mouse.

5.8 ComboBox Control


5.8.1 Description

The ComboBox control is used to display data in a dropdown combo box. By default, the ComboBox control appears in two parts: the top part is a text box that allows the user to type a list item. The second part is a list box that displays a list of items from which the user can select one.

5.8.2 Usage


The ComboBox control can behave in three different ways, depending on the value of the DropDownStyle property.

DropDownStyle = Simple



In simple mode, there is a textbox above a list box. The operator can edit or add selections by typing in the textbox area.

DropDownStyle = DropDown



In this mode, the listbox portion is not displayed until the operator clicks the down arrow button located on the right side of the text area. The operator can edit the selected text in the textbox area.

DropDownStyle = DropDownList



When DropDownList is specified, the operator cannot type text in the textbox area. Only items in the list can be selected.

For information on how to add items to the listbox portion of the ComboBox control, see the Usage information for the ListBox control for information on AddItem, List, ListCount, and SelectedIndex.

Setting ComboBox Appearance

Use the ForeColor, BackColor, and Font properties to change the appearance of the combobox.

5.8.3 ComboBox Control Properties

Property	Description
AddItem	Adds an item to the list at runtime.
BackColor	The background color for the control. Default: Window
DropDownStyle	Specifies the style of the combo box. Default: 1 – DropDown
Enabled	Sets whether the control is enabled at runtime. Default: 1 – True
EventTaskType	The type of task used for events. Default: 0 – Normal
Font	The font for the control text (design time only). Default: Microsoft Sans Serif 8.25 pt
FontBold	The bold attribute for the current font (runtime only). Default: 0 – False
FontItalic	The italic attribute for the current font (runtime only). Default: 0 – False
FontName	The name for the current font (runtime only). Default: Microsoft Sans Serif
FontSize	The size for the current font in points (runtime only). Default: 8.25
ForeColor	The foreground color for the control text. Default: WindowText
Height	The height of the control in pixels.
Left	The left coordinate of the control in pixels.
List	Use to access the items in the list at runtime.
ListCount	Use to get the number of items in the list at runtime.
Name	The name of the control. Default: ComboBoxXX
SelectedIndex	Use to determine which item has been selected by the operator at runtime.
Sorted	Sets whether to sort the items in the list or not. Default: 0 – False
TabIndex	The tab index of the control.
Text	The text of the control. Default: Empty
ToolTipText	The text used in the control's tooltip. Default: Empty
Top	The top coordinate of the control in pixels.
Visible	Whether the control is visible or not at runtime. Default: 1 – True
Width	The width of the control in pixels.


5.8.4 ComboBox Control Events

Event	Description
Click	Executes when the user clicks the control with the mouse.

5.9 PictureBox Control

5.9.1 Description

The PictureBox control is used to display graphics in bitmap, GIF, JPEG, PNG, WMF, metafile, or icon format.



5.9.2 Usage

Use a PictureBox control to display an image from a file. You can set the image for a picturebox control at design time or runtime.

Setting the Image

At design time, use the Image property to browse for an image file.

At runtime, use the Image property to specify the full path for the image file.

Changing image size

You can specify how the image is sized by using the SizeMode property.

Setting PictureBox Appearance

Use the BackColor, BorderStyle, and SizeMode properties to change the appearance of the picturebox.

5.9.3 PictureBox Control Properties

Property	Description
BackColor	The background color for the control. Default: Control
BorderStyle	The border used for the control. Default: 0 – None
Enabled	Sets whether the control is enabled at runtime. Default: 1 – True
EventTaskType	The type of task used for events. Default: 0 – Normal
Height	The height of the control in pixels.
Image	Specifies the image to be displayed. To delete, press the <Delete> key.
Left	The left coordinate of the control in pixels.
Name	The name of the control. Default: PictureBoxXX
SizeMode	Specifies how the image is sized. Default: 0 – Normal
TabIndex	The tab index of the control.

Property	Description
ToolTipText	The text used in the control's tooltip. Default: Empty
Top	The top coordinate of the control in pixels.
Visible	Whether the control is visible or not at runtime. Default: 1 – True
Width	The width of the control in pixels.


5.9.4 PictureBox Control Events

Event	Description
Click	Executes when the user clicks the control with the mouse.
DbClick	Executes when the user double clicks the control with the mouse.

5.10 GroupBox Control

5.10.1 Description

GroupBox controls are used to provide an identifiable grouping for other controls. Typically, you use group boxes to subdivide a form by function. For example, you may have a setup form that specifies robot speed options.. Grouping all options in a group box gives the user a logical visual cue.



5.10.2 Usage

Use the GroupBox control to group together controls for selecting options (using RadioButtons) or setting preferences (using CheckBoxes). You can also group together other controls as well.

First, add a GroupBox control to your form.

Next, either create new controls on the groupbox, or drag existing controls to the groupbox.

Set the Text property of the groupbox to the name of the group.

Setting GroupBox Appearance

Use the BackColor, ForeColor, and Font properties to change the appearance of the picturebox.

5.10.3 GroupBox Control Properties

Property	Description
BackColor	The background color for the control. Default: Control
Enabled	Sets whether the control is enabled at runtime. Default: 1 – True
EventTaskType	The type of task used for events. Default: 0 – Normal
Font	The font for the control text (design time only). Default: Microsoft Sans Serif 8.25 pt
ForeColor	The foreground color for the control text. Default: ControlText
FontBold	The bold attribute for the current font (runtime only). Default: 0 – False
FontItalic	The italic attribute for the current font (runtime only). Default: 0 – False
FontName	The name for the current font (runtime only). Default: Microsoft Sans Serif
FontSize	The size for the current font in points (runtime only). Default: 8.25

Property	Description
ForeColor	The foreground color for the control text. Default: ControlText
Height	The height of the control in pixels.
Left	The left coordinate of the control in pixels.
Name	The name of the control. Default: GroupBoxXX
TabIndex	The tab index of the control. Default:
Text	The text of the control. Default: Name of the Control
ToolTipText	The text used in the control's tooltip. Default: Empty
Top	The top coordinate of the control in pixels.
Visible	Whether the control is visible or not at runtime. Default: 1 – True
Width	The width of the control in pixels.

5.10.4 GroupBox Control Events

Event	Description
Click	Executes when the user clicks the control with the mouse.

5.11 Timer Control

5.11.1 Description

The Timer is a control that raises an event at regular intervals. It is executable even when the emergency stop occurs or other normal tasks are paused.



5.11.2 Usage

Use the Timer control to periodically execute code. For example, a Timer control could be used to update a status label every two seconds.

To use a Timer

1. Add a Timer control to a form. The control is displayed below the form in the design area, since this control is invisible at runtime.
2. Set the Interval property to the desired time period in milliseconds.
3. Set the Enabled property to True at design time if the timer should always run. Otherwise, set the Enabled property to True at runtime in your code.
4. Add an event handler for the Tick event to execute your code.



When a timer is executing the Tick event handler, other tick events from the same timer are ignored.

5.11.3 Timer Control Properties

Property	Description
Enabled	Sets whether the control is enabled. Default: 0 – False
Interval	Sets the time interval in milliseconds Default: 100
Name	The name of the control. Default: TimerXX

5.11.4 Timer Control Events

Event	Description
Tick	Occurs when the time is enabled and the interval has been reached.

5.12 VideoBox Control

5.12.1 Description

The VideoBox control allows you to display video for the Vision Guide option in your forms.

5.12.2 Usage

You can easily display a video window on a form in your application by using the VideoBox control. When you run a vision sequence, the graphics can also be displayed on the window.

Perform the following steps to create a vision window:

1. Place a VideoBox control on the form you want the video to be displayed. The control size can be changed up to the full size.
2. Set the VideoEnabled property to True.
3. Set the GraphicsEnabled property to True if you want to display vision graphics.
4. By default, the Camera property value is 0. This allows the videobox to display video from any camera when a sequence is run. Set the Camera property to any camera number in the project to show the video and sequence graphics for that camera.

The video is automatically scaled to fit the size of the VideoBox. When you change the height or width of the videobox, the aspect ratio is maintained.

Setting VideoBox Appearance

Use the BorderStyle property to change the appearance of the videobox.

5.12.3 VideoBox Control Properties

Property	Description
BorderStyle	The border used for the control. Default: 0 – None
Camera	Selects which camera to display video for. Default: 0
Enabled	Sets whether the control is enabled at runtime. Default: 1 – True
EventTaskType	The type of task used for events. Default: 0 – Normal
GraphicsEnabled	Sets whether vision graphics are displayed or not. Default: 0 – False
Height	The height of the control in pixels.
Left	The left coordinate of the control in pixels.
Name	The name of the control. Default: VideoBoxXX
TabIndex	The tab index of the control.
ToolTipText	The text used in the control's tooltip. Default: Empty
Top	The top coordinate of the control in pixels.
VideoEnabled	Sets whether video is displayed on not. Default: 0 - False

Property	Description
Visible	Whether the control is visible or not at runtime. Default: 1 – True
Width	The width of the control in pixels.


5.12.4 VideoBox Control Events

Event	Description
Click	Executes when the user clicks the control with the mouse.
DbClick	Executes when the user double clicks the control with the mouse.

5.13 LED Control

5.13.1 Description

The LED control is used to display I/O status.



5.13.2 Usage

To use the LED control

1. Set the Text property to the name of the status.
2. Set the IOType property. You can choose from input, output, or memory I/O.
3. Set the IOBit property. This is the bit you want to display the status for.

For outputs, you can optionally allow the operator to double click on the LED control to toggle the output status. To do this, set the AllowStateChange property to True.

Setting LED Appearance

Use the BackColor, BorderStyle, ForeColor, Font, ImageAlign, and TextAlign properties to change the appearance of the LED.

You can also change the ImageOn and ImageOff properties to use the built-in color images, or you can provide your own images.

5.13.3 LED Control Properties

Property	Description
AllowStateChange	Allows the operator to toggle output status Default: 0 – False
BackColor	The background color for the control. Default: Control
BorderStyle	The border used for the control. Default: 0 – None
Enabled	Sets whether the control is enabled at runtime. Default: 1 – True
EventTaskType	The type of task used for events. Default: 0 – Normal
Font	The font for the control text (design time only). Default: Microsoft Sans Serif 8.25 pt
FontBold	The bold attribute for the current font (runtime only). Default: 0 – False
FontItalic	The italic attribute for the current font (runtime only). Default: 0 – False
FontName	The name for the current font (runtime only). Default: Microsoft Sans Serif
FontSize	The size for the current font in points (runtime only). Default: 8.25
ForeColor	The foreground color for the control text. Default: ControlText
Height	The height of the control in pixels.

Property	Description
ImageAlign	The picture alignment for the control. Default: 4 - MiddleLeft
ImageOff	This sets the image displayed when the I/O status is off. Default: LedOff.ico
ImageOn	This sets the image displayed when the I/O status is on. Default: LedRed.ico
IOBit	Range: 0 to 9999 Default: 0
IOType	This sets the type of I/O to monitor. Default: 0 – Input
Left	The left coordinate of the control in pixels.
Name	The name of the control. Default: LedXX
TabIndex	The tab index of the control.
Text	The text of the control. Default: Name of control
TextAlign	Selects the text alignment. Default: 6 – MiddleRight
ToolTipText	The text used in the control's tooltip. Default: Empty
Top	The top coordinate of the control in pixels.
Visible	Whether the control is visible or not at runtime. Default: 1 – True
Width	The width of the control in pixels.

5.13.4 LED Control Events

Event	Description
DbClick	Executes when the user double clicks the control with the mouse.

5.14 StatusBar Control

5.14.1 Description

The StatusBar control displays status text and optional panels for date/time, Estop status, Safeguard status, and robot information.

5.14.2 Usage

Use a StatusBar control to display status text and other built-in status. The text panel is always visible. Use the Text property to set the text in the text panel. There are other status panels that by default are not visible: DateTime, Estop, Robot, Safeguard. Use ShowDateTime, ShowEStop, ShowRobot, and ShowSafeguard properties to make these panels visible or not. These panels are automatically updated by the system.

5.14.3 StatusBar Control Properties

Property	Description
BackColor	The background color for the control. Default: Control
BorderStyle	The border used for the control. Default: 0 – None
Dock	Sets docking position on the form for a control. Default: 2 –Bottom
Enabled	Sets whether the control is enabled at runtime. Default: 1 – True
EventTaskType	Sets the type of task used for events. Default: 0 – Normal
Font	The font for the control text (design time only). Default: Microsoft Sans Serif 8.25 pt
ForeColor	The foreground color for the control text. Default: ControlText
Height	The height of the control in pixels.
Left	The left coordinate of the control in pixels.
Name	The name of the control. Default: StatusBarXX
RobotNumber	Specified the robot number used for ShowRobot.
ShowDateTime	Sets whether to display the current date and time. Default: 0 - False
ShowEStop	Sets whether to display Estop status. Default: 0 - False
ShowRobot	Sets whether to display the robot that is selected by the RobotNumber property. Default: 0 - False
ShowSafeguard	Sets whether to display the Safeguard status. Default: 0 - False
TabIndex	The tab index of the control.

Property	Description
Text	The text displayed in the StatusBar text panel. Default: Name of control
ToolTipText	The text used in the control's tooltip. Default: Empty
Top	The top coordinate of the control in pixels.
Visible	Whether the control is visible or not at runtime. Default: 1 – True
Width	The width of the control in pixels.

5.14.4 StatusBar Control Events

Event	Description
Click	Executes when the user clicks the control with the mouse.

5.15 ProgressBar Control

5.15.1 Description

A ProgressBar control is used to graphically display the status of processing or a value.

5.15.2 Usage

Use the ProgressBar control to show the status of a long running operation or the value of a variable.

Displaying SPEL+ Global Variable Status

You can display the value of a SPEL+ global variable automatically by setting the Variable property.

NOTE

If the SPEL+ global variable is not displayed by the setting of Variable property, rebuild the project.

5.15.3 ProgressBar Control Properties

Property	Description
BackColor	The background color for the control. Default: Control
BorderStyle	The border used for the control. Default: 0 – None
Dock	Sets docking operation for the control. Default: 0 –None
Enabled	Sets whether the control is enabled at runtime. Default: 1 – True
EventTaskType	Sets the type of task used for events. Default: 0 – Normal
ForeColor	The foreground color for the control text. Default: ControlText
Height	The height of the control in pixels.
Left	The left coordinate of the control in pixels.
Maximum	Sets the maximum of the range that the control is processing. Default: 100
Minimum	Sets the minimum of the range that the control is processing. Default: 0
Name	The name of the control. Default: ProgressBarXX
Orientation	Sets the orientation of the control. Default: 0 – Horizontal
ProgressBarStyle	Sets the style of the ProgressBar control. Default: 0 – Blocks
Step	Sets the amount to increment the current value of the control. Default: 10
TabIndex	The tab index of the control.
ToolTipText	The text used in the control's tooltip. Default: Empty

Property	Description
Top	The top coordinate of the control in pixels.
Value	Sets the value that specifies the progress bar position. Default: 50
Variable	This is an optional SPEL+ global integer variable. When specified, the Value property is automatically set to the variable value at runtime. Default: None
Visible	Sets whether the control is visible or not at runtime. Default: 1 - True
Width	The width of the control in pixels.

5.15.4 ProgressBar Control Events

Event	Description
Click	Executes when the user clicks the control with the mouse.
DbClick	Executes when the user double clicks the control with the mouse.

5.16 TrackBar Control

5.16.1 Description

A TrackBar control is used to allow the operator to set a value by dragging a slider.

5.16.2 Usage

Use the TrackBar control when you want to support changing a value graphically.

Displaying SPEL+ Global Variable Status

You can set the value of a SPEL+ global variable automatically according to the trackbar value by using the Variable property.

NOTE

If the SPEL+ global variable is not updated by the setting of Variable property, rebuild the project.

5.16.3 TrackBar Control Properties

Property	Description
BackColor	The background color for the control. Default: Control
Enabled	Sets whether the control is enabled at runtime. Default: 1 – True
EventTaskType	Sets the type of task used for events. Default: 0 – Normal
Height	The height of the control in pixels.
LargeChange	Sets the number of positions that the slider moves when clicking the mouse on either side of the bar or by pressing Page Up and Page Down keys. Default: 5
Left	The left coordinate of the control in pixels.
Maximum	Sets the maximum of the range that the control is processing. Default: 10
Minimum	Sets the minimum of the range that the control is processing. Default: 0
Name	The name of the control. Default: TrackBarXX
Orientation	Sets the orientation of the control. Default: 0 – Horizontal
SmallChange	Sets the number of positions that the slider moves for keyboard inputs (arrow orientation keys). Default: 1
TabIndex	The tab index of the control.
TickFrequency	Sets the interval of the tick marks. Default: 1
TickStyle	Sets where to display the tick marks on the track bar. Default: 2 - BottomRight
ToolTipText	The text used in the control's tooltip. Default: Empty

Property	Description
Top	The top coordinate of the control in pixels.
Value	Sets the value that represents the control's current position. Default: 0
Variable	This is an optional SPEL+ global integer variable. When specified, the variable is automatically set according to the slider position. Default: None
Visible	Sets whether the control is visible or not at runtime. Default: 1 - True
Width	The width of the control in pixels.


5.16.4 TrackBar Control Events

Event	Description
Scroll	Executes after the slider on the track bar has been moved.

5.17 Grid Control

5.17.1 Description

The Grid control is used to display and allow editing of data in a spreadsheet format.

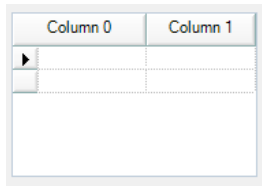

5.17.2 Usage

The Grid control has cells that contain data in rows and columns. The operator can select rows and cells. The operator can optionally edit the cells in the specified columns.

At design time you can configure the Grid control:

1. Click the GridEditor property to open the designer of the grid control.
2. Design the grid by setting properties to the desired values.
3. Close the designer.

At runtime:

- You can read and write cell text using the CellText property.
- You can add or remove rows using AddRow and RemoveRow properties.
- You can change a cell forecolor and backcolor using the CellForeColor and CellBackColor properties.

5.17.3 Grid Control Properties

Property	Description
AddRow	Adds a row at runtime.
BorderStyle	The background color for the control. Default: Control
CellBackColor	Sets or gets the back color of a cell at runtime.
CellForeColor	Sets or gets the fore color of a cell at runtime.
CellText	Sets or gets the text in the cell at runtime.
Enabled	Sets whether the control is enabled at runtime. Default: 1 – True
EventTaskType	Sets the type of task used for events. Default: 0 – Normal
GridEditor	Opens the designer to setup the Grid control.
Height	The height of the control in pixels.
Left	The left coordinate of the control in pixels.
Name	The name of the control. Default: GridXX
RemoveRow	Removes a row at runtime.
RowCount	Sets or gets the number of rows at runtime.
ScrollBars	Sets how to display the scrollbars for the control. Default: 0 - None


SelectedIndex	Sets or gets the selected row at runtime.
Top	The top coordinate of the control in pixels.
Visible	Sets whether the control is visible or not at runtime. Default: 1 – True
Width	The width of the control in pixels.

5.17.4 Grid Control Events

Event	Description
CellChanged	Executes when the user leaves a cell that was changed.
Click	Executes when the user clicks the control with the mouse.
DbClick	Executes when the user double clicks the control with the mouse.

5.17.5 GridEditor

The grid editor is a dialog where the user can modify and set up the grid control. It is only available at design time. It has many properties to set in order to best suit the user's needs. To get more information on the Grid Editor, refer to the Grid Editor property.

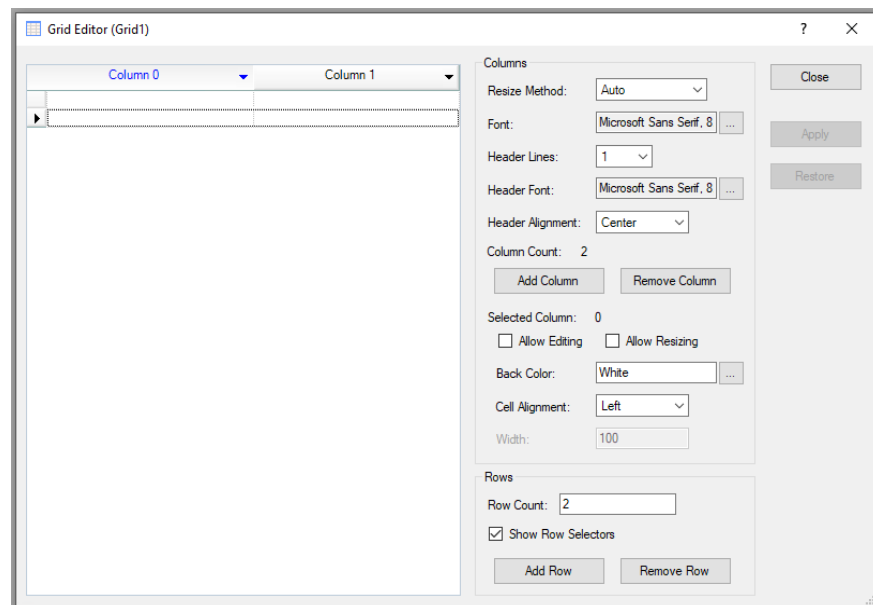

6. Operation

6.1 Overview

This chapter contains the following topics:

- Developing your GUI in Program Mode
- Configuring your GUI startup in Auto Mode
- Handling pause and continue
- Handling emergency stop
- Using a help file

6.2 GUI Development in Program Mode

You design and debug your GUI application in program mode.

To begin, start EPSON RC+ 7.0 in program mode.

6.2.1 Design the GUI

To design the GUI for your application, follow these steps as a simple guideline.


1. Create one or more forms for the application. Typically you will designate one of the forms to be your main form.
2. Decide on how you want to start the GUI. You can set one of the forms as your startup form. This form will automatically be displayed when RC+ starts in auto mode. If you do not want to display a form at startup, then the Operator Window will be displayed and you can display any form from SPEL+ code using GShow or GShowDialog.
3. Add controls to the forms.
4. Add desired events to the controls.

For details on working with forms and controls, see the chapter *Working with Forms and Controls*.

6.2.2 Debugging

You can run any of the forms in the project from the Run Window.

1. Open the Run Window

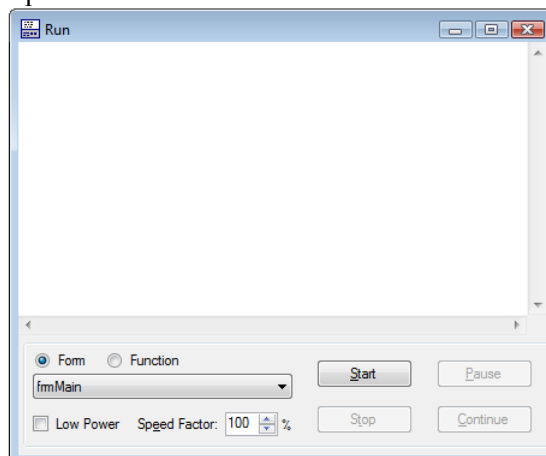

2. Select the form you want to run from the dropdown list.
3. Click Start. The selected form will be displayed and you can use the controls on the form.
4. To stop, close all forms, or click the Stop button on the Run Window.

GUI event handlers run as SPEL⁺ tasks, so you can set a breakpoint in any event handler, step through code, and view variable values.

6.3 Auto Mode

After you have developed your application, you will need to setup EPSON RC+ to run in Auto mode. At startup time, you can choose to show one of your GUI forms, or you can show the Operator Window and then display one of your forms from your program.

To set EPSON RC+ to start in Auto mode

1. Open Setup | System Configuration.
2. In the Start Mode page, check Auto and click Apply, then click Close.

To configure a form to be displayed at startup

1. Open the GUI Builder window.
2. In the Forms Explorer, right click on the form you want displayed at startup and select Startup Form.
3. Click the Project Save button on the main toolbar.

6.4 Handling Pause and Continue

You may want to use the pause and continue feature of the controller in your GUI. Typically, you will have a dialog with a pause button and a continue button. For these buttons to work properly, you need to set the `EventTaskType` property for each button to 1 – `NoPause`. This is because when the button click event executes, the event task must ignore the pause state of the controller.

```
Function frmMain_btnPause_Click(Sender$ As String)
    Pause
End

Function frmMain_btnCont_Click(Sender$ As String)
    Cont
End
```

6.5 Handling Emergency Stop

After an emergency stop, you must reset the emergency stop condition before you can run the robot again. To do this, provide a reset button with the `EventTaskType` set to 2 – `NoEmgAbort`.

```
Function frmMain_btnReset_Click(Sender$ As String)
    Reset
    If EstopOn Then
        MsgBox "EStop could not be reset"
    EndIf
End
Fend
```


6.6 Using a Help File

GUI Builder supports a simple help system by allowing you to specify a help file for the project from which you can show a topic when a form help button is clicked by the operator.

Help files must be in the Microsoft HTML help format.

To use a help file:

1. Open Project | Properties | GUI Builder.
2. Browse to the help file and click open to set the help file.

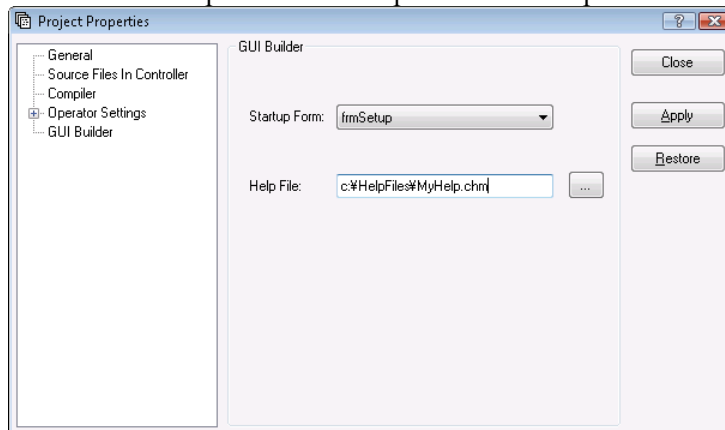

3. For each form that will show help, set the `HelpButton` property to `True`, and set the `HelpID` property for the topic you want to display.

7. GUI Builder Reference

7.1 Overview

This chapter explains all GUI Builder form and control properties and events, and all GUI Builder SPEL+ commands. For more information on how to use GUI Builder, refer to the GUI Builder manual.

7.2 GUI Builder Properties and Events Format Description

All GUI Builder properties and events are listed in the pages that follow. An explanation of the headings for the property and result reference pages is given below:

Applies To	If the property or event is used with GUI Builder objects, then this section simply lists the objects for which this property applies. (Ex. Button, Label, Checkbox...) If the property or event is used with forms then the word Forms will appear in this section.
Description	A simple description is given for each property or event. This section is normally very short for simplicity.
Usage	The Usage Section describes how to access the property or event from the SPEL+ Language.
Values	Describes the range of acceptable values which the property can be set to or which the result will return. A default value is also shown for those properties that have a default.
Remarks	Explains more details than the Description Section. This section is normally used to describe any caveats or special information that may apply to the specific property or event. (It is highly recommended to read the Remarks Section for each property prior to its usage.)
See Also	Gives a list of related properties, results, objects and other topics that may prove useful to review.
Runtime only	This is displayed under the property or result name when it applies. Runtime only properties and results cannot be accessed from the GUI Builder. They can only be accessed from the SPEL+ language.

AcceptButton Property

Applies To

Form

Description

Gets or sets the button on the form that is clicked when the user presses the ENTER key.

Usage

GGet *Form.AcceptButton, var*

GSet *Form.AcceptButton, value*

Form Name of a form or string variable containing a form name.

var String variable that will contain the value of the property.

value String expression for the new value of the property.

Values

The name of any button on the form.

Default: None

Remarks

This property allows you to designate a default action to occur when the user presses the ENTER key in your application. The button assigned to this property must be a Button that is on the current form or located within a container on the current form.

You can use this property to allow the user to quickly navigate a simple form by allowing them to simply press the ENTER key when they are finished instead of manually clicking the accept button with their mouse.

The accept button might not be activated if the currently selected control on the form intercepts the ENTER key and processes it. For example, a multiline text box control allows the ENTER key to be pressed when it is selected to insert a new line character in the control.

See Also

Form, Button, CancelButton

Example

```
GSet frmMain.AcceptButton, "btnOK"
```


AddItem Property

Applies To

ListBox, ComboBox

Description

Used to add an item to a ListBox or ComboBox control.

Usage

GSet *Form.Control.AddItem, value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name. The control must exist in the specified form.

value String expression for the new value of the property.

Values

A string value to be added to the list.

See Also

ComboBox, ListBox, List, ListCount, Sorted

Example

```
GSet frmMain.lstModels.AddItem, "Model1"
```

AddRow Property

Applies To

Grid

Description

Used to add a row to a Grid control during runtime.

Usage

GSet *Form.Control.AddRow, value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name. The control must exist in the specified form.

value Integer representing the index of the newly added row. Specifying “-1” causes the new row to be appended after last row. Otherwise, the new row is inserted at the specified row index.

See Also

Grid, RemoveRow, RowCount

Example

```
GSet frmMain.Grid01.AddRow, 0
```

AppendText Property

Applies To

TextBox

Description

Appends text to a TextBox control.

Usage

GSet *Form.Control.AppendText, value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name. The control must exist in the specified form.

value String expression for the new value of the property.

Values

A string that will be added to the end of the text in the control.

See Also

TextBox

Example

```
GSet frmMain.txtStatus.AppendText, "Cycle Complete"
```

AllowStateChange Property

Applies To

LED

Description

Gets or sets the inversion actuation of LED control when double-clicked.

Usage

GGet *Form.Control.AllowStateChange, var*

GSet *Form.Control.AllowStateChange, value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.
The control must exist in the specified form.

var Boolean variable that will contain the value of the property.

value Boolean expression for the new value of the property.

Values

0 – False

1 – True

Default: 0 – False

Remarks

To invert output, set IOType property in 1 – Output or 2 – Memory.

See Also

LED, IOType

Example

```
GSet frmMain.Led1.AllowStateChange, True
```

BackColor Property

Applies To

Form, Button, Label, TextBox, RadioButton, CheckBox, ListBox, ComboBox, PictureBox, GroupBox, LED, ProgressBar, TrackBar, StatusBar

Description

Gets or sets the background color of a form or control.

Usage

GGet *Form.Control.BackColor, var*

GSet *Form.Control.BackColor, value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

var String variable that will contain the value of the property.

value String expression for the new value of the property.

Values

The name of the color to be used for the background color of the form or control.

Default: Control (Form, Button, Label, RadioButton, CheckBox, PictureBox, GroupBox, LED)
Window (TextBox, ListBox, ComboBox)

See Also

BackColorMode, Form, Button, Label, TextBox, RadioButton, Checkbox, ListBox, ComboBox, PictureBox, GroupBox, LED, ProgressBar, TrackBar, StatusBar

Example

```
GSet frmMain.lblStatus.BackColor, "Red"
```

BackColorMode Property

Applies To

Button

Description

Gets or sets the BackColorMode used for a button control.

Usage

GGet *Form.Control.BackColorMode, var*

GSet *Form.Control.BackColorMode, value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

var Integer variable that will contain the value of the property.

value Integer expression for the new value of the property.

Values

0 – VisualStyle. Uses the system specified BackColor.

1 - User. Uses the specified BackColor.

Remarks

When **BackColorMode** is 0, the background color for the control is set by Windows, depending on the current theme.

When **BackColorMode** is 1, the background color is set by the BackColor property value.

Default: 0 – Visual Style

See Also

BackColor, Button

Example

```
GSet frmMain.btnOK.BackColorMode, BACKCOLORMODE_USER
```

BorderStyle Property

Applies To

Label, TextBox, ListBox, PictureBox, VideoBox, LED, ProgressBar, StatusBar, Grid

Description

Gets or sets the control's border style.

Usage

GGet *Form.Control.BorderStyle, var*

GSet *Form.Control.BorderStyle, value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

var Integer variable that will contain the value of the property.

value Integer expression for the new value of the property.

Values

0 - None

1 - FixedSingle

2 - Fixed3D

Default: 0 – None (Label, PictureBox, VideoBox, LED)
2 – Fixed3D (TextBox, ListBox)

Remarks

You can use this property to add a border to the control. For example, this property can be used to differentiate a Label that labels another control from a Label that displays the status of a process in an application.

See Also

Label, TextBox, ListBox, PictureBox, VideoBox, LED, ProgressBar, StatusBar

Example

```
GSet frmMain.lblStatus.BorderStyle, BORDERSTYLE_NONE
```

Camera Property

Applies To

VideoBox

Description

Gets or sets the camera number for the VideoBox control.

Usage

GGet *Form.Control.Camera, var*

GSet *Form.Control.Camera, value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

var Integer variable that will contain the value of the property.

value Integer expression for the new value of the property.

Values

The camera number for the video display. If the value is 0, then the video from any camera is displayed when VRun executes. To display the video, set the VideoEnabled property to “1 – True”.

See Also

VideoBox, VideoEnabled

Example

```
GSet frmMain.VideoBox1.Camera, 1
```


CancelButton Property

Applies To

Form

Description

Gets or sets the button on the form that is clicked when the user presses the ESC key.

Usage

GGet *Form.CancelButton, var*

GSet *Form.CancelButton, value*

Form Name of a form or string variable containing a form name.

var String variable that will contain the value of the property.

value String expression for the new value of the property.

Values

The name of any button on the form.

Default: None

Remarks

The cancel button for a form is the button control that is clicked whenever the user presses the ESC key. The button assigned to this property must be a button that is on the current form or located within a container on the current form.

This property allows you to designate a default action to occur when the user presses the ESC key in your application. You can use this property to allow the user to quickly navigate a simple form by allowing them to simply press the ESC key to close a window without committing changes instead of manually clicking the cancel button with their mouse.

CancelButton may not work if another control on the form intercepts the ESC key. For example, if you have a ComboBox open on your form, ESC will close the ComboBox instead of closing the Form.

The Button control assigned to **CancelButton** must be visible on the form, or else pressing the ESC key will have no effect.

See Also

Form, Button, AcceptButton

Example

```
GSet frmMain.CancelButton, "btnCancel"
```

CellBackColor Property

Applies To

Grid

Description

Gets or sets the background color for a Grid cell at runtime.

Usage

GGet *Form.Control.CellBackColor* (*row, column*), *var*

GSet *Form.Control.CellBackColor* (*row, column*), *value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

row Integer expression for the cell row. The index of the first row is "0".

column Integer expression for the cell column. The index of the first column is "0".

var String variable that will contain the value of the property.

value String expression for the new value of the property.

Values

A string containing the name of the background color for the specified grid cell.

See Also

Grid, CellForeColor, CellText

Example

```
GSet frmMain.gridMyData.CellBackColor(1, 1), "Red"
```

CellChanged Event

Applies To

Grid

Description

Occurs when you leave a cell that has been changed.

Usage

Form_Control_CellChanged (*sender\$* As String, *CellText\$* As String, *RowNumber* As Integer, *ColumnNumber* As Integer)

Sender\$ Name of a control that sent the event.

CellText\$ Text of the changed cell.

RowNumber Row number of the changed cell.

ColumnNumber Column number of the changed cell.

Remarks

The CellChanged event is used to respond to when the user leaves a cell that has been modified. You can use the *Sender\$* parameter to determine which control sent the event, the *CellText\$* parameter to see what the value the cell now has, and the *RowNumber* and *ColumnNumber* parameters to determine which cell triggered the event. This is useful when you want to see when specific cells are changed or whenever any cell is changed.

See Also

Grid

Example

```
Function frmMain_Grid1_CellChanged(Sender$ As String, CellText$ As String,  
    RowNumber As Integer, ColumnNumber As Integer)  
    Xqt main  
End
```

CellForeColor Property

Applies To

Grid

Description

Gets or sets the foreground color for a Grid cell at runtime.

Usage

GGet *Form.Control.CellForeColor* (*row, column*), *var*

GSet *Form.Control.CellForeColor* (*row, column*), *value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

row Integer expression for the cell row. The index of the first row is 0.

column Integer expression for the cell column. The index of the first column is 0.

var String variable that will contain the value of the property.

value String expression for the new value of the property.

Values

A string containing the name of the foreground color for the specified grid cell.

See Also

Grid, CellBackColor, CellText

Example

```
GSet frmMain.gridMyData.CellForeColor(1, 1), "Red"
```

CellText Property

Applies To

Grid

Description

Gets or sets the text in a Grid cell at runtime.

Usage

GGet *Form.Control.CellText* (*row*, *column*), *var*

GSet *Form.Control.CellText* (*row*, *column*), *value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

row Integer expression for the cell row. The index for the first row is 0.

column Integer expression for the cell column. The index for the first column is 0.

var String variable that will contain the value of the property.

value String expression for the new value of the property.

Values

A string containing the text of the specified grid cell.

See Also

Grid, CellForeColor, CellBackColor

Example

```
GSet frmMain.gridMyData.CellText(1, 1), "Value1"
```

Checked Property

Applies To

RadioButton, Checkbox

Description

Gets or sets a value indicating whether the CheckBox or RadioButton control is checked.

Usage

GGet *Form.Control.Checked, var*

GSet *Form.Control.Checked, value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

var Boolean variable that will contain the value of the property.

value Boolean expression for the new value of the property.

Values

0 - False

1 - True

Default: 0 - False

Remarks

Use this property to determine whether the CheckBox or RadioButton control is checked. This property can also be used to programmatically set the state of the CheckBox or RadioButton control.

See Also

RadioButton, CheckBox

Example

```
GSet frmMain.chkHiPower.Checked, False
```

Click Event

Applies To

Button, Label, RadioButton, Checkbox, ListBox, ComboBox, PictureBox, GroupBox, VideoBox, ProgressBar, StatusBar, Grid

Description

Occurs when a control is clicked.

Usage

Form_Control_Click (*sender\$* As String)

Sender\$ Name of a control that sent the event.

Remarks

The Click event is used to respond to a click on a control by the user. You can use the *Sender\$* parameter to determine which control sent the event. This is useful when you want to use one function to handle more than one control, such as for radio buttons and check boxes.

See Also

Button, Label, RadioButton, Checkbox, ListBox, ComboBox, PictureBox, GroupBox, VideoBox, ProgressBar, StatusBar

Example

```
Function frmMain_btnStart_Click(Sender$ As String)
    Xqt main
End
```

Closed Event

Applies To

Form

Description

Occurs when a form has been closed.

Usage

Form_Closed (*Sender\$* As String)

Sender\$ Name of the form that sent the event.

Remarks

You can use this event to perform tasks after a form has been closed.

See Also

Form, Load, Resize

Example

```
Function frmMain_Closed(Sender$ As String)

    Print "frmMain was closed"
End
```


ControlBox Property

Applies To

Form

Description

Gets or sets a value indicating whether a control box is displayed in the caption bar of the form.

Usage

GGet *Form.ControlBox*, *var*

GSet *Form.ControlBox*, *value*

Form Name of a form or string variable containing a form name.

var Boolean variable that will contain the value of the property.

value Boolean expression for the new value of the property.

Values

0 - False

1 - True

Default: True

Remarks

If the **ControlBox** property is set to true, the control box is displayed in the upper-left corner of the form's title bar. The control box can be used to close the form.

See Also

Form, MaximizeBox, MinimizeBox

Example

```
GSet frmMain.ControlBox, False
```

Controls Property

Applies To

Form

Description

Array of controls in the form. Used to access control properties with an index.

Usage

GGet *Form.Controls(Index As Integer).Property, var*

GSet *Form. Controls(Index As Integer).Property, value*

Form Name of a form or string variable containing a form name.

Index Integer expression containing the index of a control on the form.

Property Name of the control property to access.

var Variable that will contain the value of the property. The data type depends on which property is specified.

value Expression for the new value of the property. The data type depends on which property is specified.

Remarks

Use the Controls property to access controls on the form using an index. This allows you to iterate through the control collection and get or set common properties.

See Also

Count, Type

Example

```
Integer i, count
String type$

GGet frmMain.Controls.Count, count
For i = 1 To count
    GGet frmMain.Controls(i).Type, type$
    If type$ = "Button" Then
        GSet frmMain.Controls(i).Enabled, False
    EndIf
Next i
```

Count Property

Applies To

Form.Controls

Description

Gets the number of controls on a form.

Usage

GGet *Form.Controls.Count*, *var*

Form Name of a form or string variable containing a form name.

var Integer variable that will contain the value of the property.

Values

Returns the number of controls on a form.

Remarks

Use the Count property to determine the number of controls on a form. Then you can iterate through all the controls using the Controls property.

See Also

Controls, Type

Example

```
Integer count

GSet frmMain.Controls.Count, count
For i = 1 To count
    GGet frmMain.Controls(i).Type, type$
    If type$ = "Button" Then
        GSet frmMain.Controls(i).Enabled, False
    EndIf
Next i
```

DbIcClick Event

Applies To

Label, ListBox, Led, PictureBox, VideoBox, LED, ProgressBar, Grid

Description

Occurs when a control is double clicked.

Usage

Form_Control_DbIcClick (*Sender\$* As String)

Sender\$ Name of a control that sent the event.

Remarks

The **DbIcClick** event is used to respond to a double click on a control by the user. You can use the *Sender\$* parameter to determine which control sent the event.

See Also

Label, ListBox, PictureBox, VideoBox, LED, ProgressBar

Example

```
Function frmMain_lstModels_DbIcClick(Sender$ As String)
    Integer index
    GGet frmMain.lstModels.SelectedIndex, index
    GGet frmMain.lstModels.List(index), g_CurrModel$
End
```

DialogResult Property

Applies To

Form

Description

Gets or sets the dialog result for a form.

Usage

GGet *Form.DialogResult, var*

GSet *Form.DialogResult, value*

Form Name of a form or string variable containing a form name.

var Integer variable that will contain the value of the property.

value Integer expression for the new value of the property.

Values

0 – None

1 – OK

2 – Cancel

Default: 2 – Cancel

Remarks

DialogResult is used to indicated if the user accepted a form or canceled it. Typically, a dialog has an OK button and a Cancel button. When the user clicks the OK button, the DialogResult property is set to 1 - OK in the button click event. If the Cancel button is clicked, the DialogResult property is set to 2 – Cancel.

See Also

Form

Example

```
Function frmSetSpeed_btnOK_Click(Sender$ As String)
    GSet frmSetSpeed.DialogResult, DIALOGRESULT_OK
    GClose frmSetSpeed
GClose frmSetSpeed
Fend

Function frmMain_btnSetSpeed_Click(Sender$ As String)
    Integer result
    String speed$
    result = GShowDialog(frmSetSpeed)
    If result = DIALOGRESULT_OK Then
        GGet frmSetSpeed.txtSpeed.Text, speed$
        g_RobotSpeed = Val(speed$)
    Fend
```

Dock Property

Applies To

ProgressBar, StausBar

Description

Gets or sets a docking operation of the status bar.

Usage

GGet *Form.Control.Dock, var*

GSet *Form.Control.Dock, value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

var Integer variable that will contain the value of the property.

value Integer expression for the new value of the property.

Values

0 – None

1 – Top

2 – Bottom

3 – Left

4 – Right

5 – Fill

Default: ProgressBar: 0 – None, StatusBar: 2 - Bottom

See Also

ProgressBar, StatusBar

Example

```
GSet frmStatus.ProgressBar1.Dock, DOCK_TOP
```

DropDownStyle Property

Applies To

ComboBox

Description

Gets or sets a value specifying the style of the combo box.

Usage

GGet *Form.Control.DropDownStyle*, *var*

GSet *Form.Control.DropDownStyle*, *value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

var Integer variable that will contain the value of the property.

value Integer expression for the new value of the property.

Values

0 – Simple

1 – DropDown

2 – DropDownList

Default: 1 – DropDown

Remarks

The **DropDownStyle** property controls the interface that is presented to the user. You can enter a value that provides a simple drop-down list box, where the list always displays, a drop-down list box, where the text portion is not editable and you must select an arrow to view the drop-down, or the default drop-down list box, where the text portion is editable and the user must press the arrow key to view the list. To always display a list that the user cannot edit, use a ListBox control.

See Also

ComboBox

Example

```
GSet frmMain.cmbPartNames.DropDownStyle, DROPDOWNSTYLE_SIMPLE
```

Enabled Property

Applies To

Button, Label, TextBox, RadioButton, CheckBox, ListBox, ComboBox, PictureBox, GroupBox, Timer, VideoBox, LED, ProgressBar, TrackBar, StatusBar, Grid

Description

Gets or sets whether a control is enabled or not at runtime.

Usage

GGet *Form.Control.Enabled*, *var*

GSet *Form.Control.Enabled*, *value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

var Boolean variable that will contain the value of the property.

value Boolean expression for the new value of the property.

Values

0 – False

1 – True

Default: 1 – True (for others than Timer)

0 – False (for Timer)

Remarks

In certain situations, you need to prevent the operator from clicking a control, such as a button. For example, when SPEL⁺ tasks are not running, you can dim a Pause button by setting Enabled to 0 – False.

See Also

Button, Label, TextBox, RadioButton, Checkbox, ListBox, ComboBox, PictureBox, GroupBox, Timer, VideoBox, LED, ProgressBar, TrackBar, StatusBar

Example

```
GSet frmMain.btnPause.Enabled, False
```


EventTaskType Property

Applies To

Form, Button, Label, TextBox, RadioButton, CheckBox, ListBox, ComboBox, PictureBox, GroupBox, VideoBox, LED, ProgressBar, TrackBar, StatusBar, Grid

Description

Gets the task type of the function that starts with the event.

Usage

GGet *Form*.[*Control*].**EventTaskType**, *var*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

var Integer variable that will contain the value of the property.

Values

0 – Normal

1 – NoPause

2 – NoEmgAbort

Default: 0 – Normal

Remarks

When this property is set to 1–NoPause, the event handler function is able to be run when other tasks are paused.

When this property is set to 2–NoEmgAbort, the event handler function is able to be run in the emergency stop state.

See Also

Form, Button, Label, TextBox, RadioButton, CheckBox, ListBox, ComboBox, PictureBox, GroupBox, VideoBox, LED, ProgressBar, TrackBar, StatusBar

Example

```
Integer Ttype  
GGet frmMain.btnPause.EventTaskType, Ttype
```

Font Property

From GUI Only

Applies To


Button, Label, TextBox, RadioButton, CheckBox, ListBox, ComboBox, GroupBox, LED, StatusBar

Description

The Font property allows you to change font parameters for a control at design time. (Font name, style, size)

Usage

From the GUI Builder window Property Grid, select a control on a form and click the button in the Font property value. The following dialog is displayed.

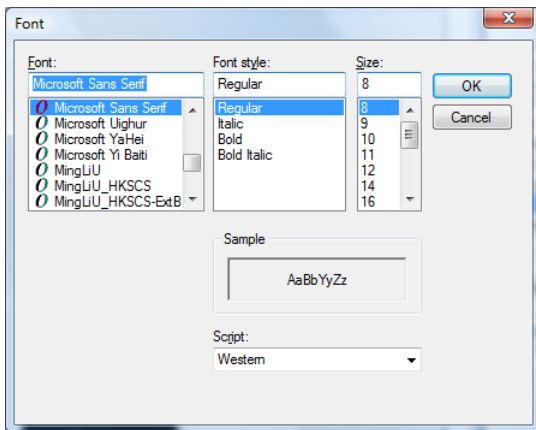

Change the settings and click OK to save them.

See Also

Button, Label, TextBox, RadioButton, Checkbox, ListBox, ComboBox, GroupBox, LED, StatusBar

FontBold Property

Applies To

Button, Label, TextBox, RadioButton, CheckBox, ListBox, ComboBox, GroupBox, LED, StatusBar

Description

Gets or sets if the font for the text used on a control is bold at runtime.

Usage

GGet *Form.Control.FontBold, var*

GSet *Form.Control.FontBold, value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

var Boolean variable that will contain the value of the property.

value Boolean expression for the new value of the property.

Values

0 – False

1 – True

Default: 0 – False

See Also

Button, Label, TextBox, RadioButton, Checkbox, ListBox, ComboBox, GroupBox, LED, StatusBar, FontName, FontItalic, FontSize

Example

```
GSet frmMain.btnOK.FontBold, True
```

FontItalic Property

Applies To

Button, Label, TextBox, RadioButton, CheckBox, ListBox, ComboBox, GroupBox, LED, StatusBar

Description

Gets or sets if the font for a control is italic at runtime.

Usage

GGet *Form.Control.FontItalic, var*

GSet *Form.Control.FontItalic, value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

var Boolean variable that will contain the value of the property.

value Boolean expression for the new value of the property.

Values

0 – False

1 – True

Default: 0 – False

See Also

Button, Label, TextBox, RadioButton, Checkbox, ListBox, ComboBox, GroupBox, LED, StatusBar, FontName, FontBold, FontSize

Example

```
GSet frmMain.btnOK.FontItalic, True
```

FontName Property

Applies To

Button, Label, TextBox, RadioButton, CheckBox, ListBox, ComboBox, GroupBox, LED, StatusBar

Description

Gets or sets the font name of the text used on a control.

Usage

GGet *Form.Control.FontName, var*

GSet *Form.Control.FontName, value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

var String variable that will contain the value of the property.

value String expression for the new value of the property.

Values

A string containing the name of the font.

Default: Microsoft Sans Serif

See Also

Button, Label, TextBox, RadioButton, Checkbox, ListBox, ComboBox, GroupBox, LED, StatusBar, FontSize, FontItalic, FontBold

Example

```
GSet frmMain.txtStatus.FontName, "Courier New"
```

FontSize Property

Applies To

Button, Label, TextBox, RadioButton, CheckBox, ListBox, ComboBox, GroupBox, LED, StatusBar

Description

Gets or sets the font size of the text used on a control.

Usage

GGet *Form.Control.FontSize*, *var*

GSet *Form.Control.FontSize*, *value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

var Real variable that will contain the value of the property.

value Real expression for the new value of the property.

Values

The value of the font size in points.

Default: 8.25

See Also

Button, Label, TextBox, RadioButton, Checkbox, ListBox, ComboBox, GroupBox, LED, StatusBar, FontName, FontItalic, FontBold

Example

```
GSet frmMain.btnOK.FontSize, 16
```

ForeColor Property

Applies To

Button, Label, TextBox, RadioButton, CheckBox, ListBox, ComboBox, GroupBox, LED, ProgressBar, StatusBar

Description

Gets or sets the foreground color of a control.

Usage

GGet *Form.Control.ForeColor, var*

GSet *Form.Control.ForeColor, value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

var String variable that will contain the value of the property.

value String expression for the new value of the property.

Values

A string that represents the foreground color of a control.

Default: Control Text (Button, Label, RadioButton, CheckBox, GroupBox, LED)
Window Text (TextBox, ListBox, ComboBox)

See Also

Button, Label, TextBox, RadioButton, Checkbox, ListBox, ComboBox, GroupBox, LED, ProgressBar, StatusBar

Example

```
GSet frmMain.btnOK.ForeColor, "Blue"
```

FormBorderStyle Property

Applies To

Form

Description

Gets or sets the border style of the form.

Usage

GGet *Form*.**FormBorderStyle**, *var*

GSet *Form*.**FormBorderStyle**, *value*

Form Name of a form or string variable containing a form name.

var Integer variable that will contain the value of the property.

value Integer expression for the new value of the property.

Values

0 – None

1 – Fixed Single

2 – Fixed3D

3 – FixedDialog

4 – Sizeable

Default: 3 – FixedDialog

See Also

Form

Example

```
GSet frmMain.FormBorderStyle, FORMBORDERSTYLE_NONE
```


GClose Statement

Applies To

Form

Description

Close the form.

Usage

GClose *Form*

Form Name of a form or string variable containing a form name. You can also supply a system form ID to close one of the following system windows:

WIN_IOMON	Closes the I/O Monitor window.
WIN_TASKMGR	Closes the Task Manager window.
WIN_FORCEMON	Closes the Force Monitor window.
WIN_SIMULATOR	Closes the Simulator window.

Remarks

Do not use GClose for a form which is not displayed.

See Also

GShow, GShowDialog

Example

```
GClose frmSetup
```

```
GClose WIN_TASKMGR
```

GGet Statement

Description

GGet is used to get the values of properties for forms and controls in the current project.

Usage

GGet *Form .Property, var*

GGet *Form .Control.Property, var*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name. The control must exist in the specified form.

Property Name of the property to set or return the value of.

var Variable(s) that will contain the value(s) returned.

Remarks

GGet is used to retrieve the value of a property at runtime.

See Also

GSet

GraphicsEnabled Property

Applies To

VideoBox

Description

Gets or sets whether the VideoBox displays vision graphics or not.

Usage

GGet *Form.Control.GraphicsEnabled, var*

GSet *Form.Control.GraphicsEnabled, value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

var Boolean variable that will contain the value of the property.

value Boolean expression for the new value of the property.

Values

0 – False

1 – True

Default: 0 – False

See Also

VideoBox, VideoEnabled


Example

```
GSet frmMain.VideoBox1.GraphicsEnabled, True
```

GridEditor Property

Applies To
Grid

Description
Opens a designer to set up the Grid control.

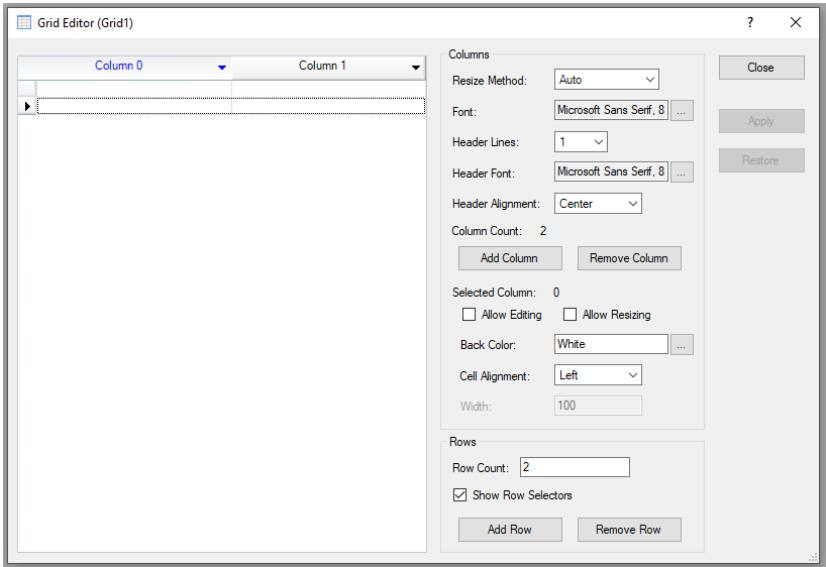

Usage

The GridEditor property can only be used at design time. Allows the user to set up the grid in order to meet their needs.

Setting	Description
Add Column	Adds a column at the end of the grid. Minimum: 1 Maximum: 25
Add Row	Adds a row at the bottom of the grid. Minimum: 0 Maximum: 10000
Allow Editing	Sets whether the user can edit cells in the selected column at runtime.
Allow Resizing	Sets whether the user can resize the selected column at runtime.
Back Color	Sets the back color of the selected column.
Cell Alignment	Sets the alignment of the cell text. Left: Aligns the cell text to the left of the column Center: Aligns the cell text in the center of the column Right: Aligns the cell text to the right of the column
Font	Sets the font for the column headers.
Header Alignment	Sets the alignment of the column headers. Left: Aligns the column name to the left of the column Center: Aligns the column name in the center of the column

Setting	Description
	Right: Aligns the column name to the right of the column
Header Lines	Sets the amount of lines available in the column headers. Minimum: 1 Maximum: 3
Remove Column	Removes the selected column.
Remove Row	Removes the selected row.
Resize Method	Decides how to resize the columns in the grid whenever a column is added, removed, or resized. Auto: Automatically resizes columns to fit the grid control. Free: Each column has their own independent width. Synchronized: Makes all of the columns the same size when a column is resized.
Row Count	Sets/displays the number of rows in the grid. To manually change this value, type in the desired rows and click <Apply> button.
Show Row Selectors	Sets whether to show the row selectors that are located on the left side of the grid.
Width	Sets/displays the width of the selected column. To manually change this value, Resize Method must not be Auto.

Remarks

Use the designer to configure the grid and how it will first appear at runtime. You can add text to cells at design time and/or add data at runtime.

Columns can be moved by dragging and dropping them to desired locations. They can also be swapped with other columns by using the drop down arrow in the column header.

Columns can be renamed by double clicking on the desired column header.

The designer supports cut, copy, paste, undo, and redo operations using a right-click menu and shortcuts.

Multiple rows can be selected when *Show Row Selectors* is set to True.

See Also

Grid

GSet Statement

Description

GSet is used to set the values of properties in GUI Builder.

Usage

GSet *Form .Property, value*

GSet *Form .Control.Property, value*

Form Name of a form or string variable containing a form name.

Control Name of an control or string variable containing an object name. The control must exist in the specified form.

Property Name of the property to set the value of.

value The expression that holds the data to be set.

Remarks

GSet is used to set the value of a form or control property at runtime.

See Also

GGet

GShow Statement

Applies To

Form

Description

GShow displays a form as a non-modal window.

Usage

GShow *Form*

Form Name of a form or string variable containing a form name. You can also supply a system form ID to show one of the following system windows:

WIN_IOMON	Opens the I/O Monitor window.
WIN_TASKMGR	Opens the Task Manager window.
WIN_FORCEMON	Opens the Force Monitor window.
WIN_SIMULATOR	Opens the Simulator window.

See Also

GClose, GShowDialog

Example

```
GShow frmIODiags
```

```
GShow WIN_TASKMGR
```

GShowDialog Function

Applies To

Form

Description

GShowDialog displays a form as a modal dialog box and returns the DialogResult value.

Usage

GShowDialog(*Form*)

Form Name of a form or string variable containing a form name.

Returns

The value of the form's DialogResult property is returned.

See Also

GShow, GShowDialog Statement

Example

```
result = GShowDialog(frmSetup)
If result = DialogResult.OK Then
    Call SaveSettings
EndIf
```


GShowDialog Statement

Applies To

Form

Description

GShowDialog displays a form as a modal dialog box without returning the DialogResult value.

Usage

GShowDialog *Form*

Form Name of a form or string variable containing a form name.

See Also

GShow, GShowDialog Function

Example

```
GShowDialog frmInfoDisplay
```

Height Property

Applies To

Form, Button, Label, TextBox, RadioButton, CheckBox, ListBox, ComboBox, PictureBox, GroupBox, VideoBox, LED, ProgressBar, TrackBar, StatusBar, Grid

Description

Get or sets the height of a form or control in pixels.

Usage

GGet *Form*.[*Control*].**Height**, *var*

GSet *Form*.[*Control*].**Height**, *value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

var Integer variable that will contain the value of the property.

value Integer expression for the new value of the property.

Values

An integer representing the height in pixels.

See Also

Form, Button, Label, TextBox, RadioButton, Checkbox, ListBox, ComboBox, PictureBox, GroupBox, VideoBox, LED, ProgressBar, TrackBar, StatusBar, Left, Top, Width

Example

```
GSet frmMain.btnOK.Height, 48
```

HelpButton Property

Applies To

Form

Description

Gets or sets a value indicating whether a Help button should be displayed in the caption box of the form.

Usage

GGet *Form.HelpButton*, *var*

GSet *Form.HelpButton*, *value*

Form Name of a form or string variable containing a form name.

var Boolean variable that will contain the value of the property.

value Boolean expression for the new value of the property.

Values

0 – False

1 – True

Default: 0 – False

Remarks

When this property is set to 1 – True, a small button with a question mark appears in the caption bar to the left of the Close button (when MaximizeBox, MinimizeBox properties are set to “False”). You can use this button to display help for your application.

See Also

Form, HelpID

Example

```
GSet frmMain.HelpButton, True
```

HelpID Property

Applies To

Form

Description

Returns or sets an Integer containing the HelpID for a topic in a Help file.

Usage

GGet *Form.HelpID*, *var*

GSet *Form.HelpID*, *value*

Form Name of a form or string variable containing a form name.

var Integer variable that will contain the value of the property.

value Integer expression for the new value of the property.

Values

An integer value that is a topic ID in the help file. (0 to 999999)

Default: 0

Remarks

The HelpID property is used to display context-sensitive Help for an application. The help file is specified in the EPSON RC+ Project | Properties | GUI Builder page.

When HelpID is not 0 and the user types F1 or clicks the form help button (if the HelpButton property is True), then the help topic is displayed.

See Also

Form, HelpButton

Example

```
GSet frmMain.HelpID, 50
```

Image Property

Applies To

Button, Label, RadioButton, CheckBox, PictureBox

Description

Gets or sets the image that is displayed on a control.

Usage

GGet *Form.Control.Image, var*

GSet *Form.Control.Image, value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

var String variable that will contain the value of the property.

value String expression for the new value of the property.

Values

A string containing the full path to an image file.

Default: Blank

NOTE

Using the Delete key, you can delete an image file that has already been set.

See Also

Button, Label, RadioButton, Checkbox, PictureBox, ImageAlign

Example

```
GSet frmMain.btnTools.Image, "c:\Images\Tools.bmp"
```

ImageAlign Property

Applies To

Button, Label, RadioButton, CheckBox, LED

Description

Gets or sets the image alignment for the image that is displayed on a control.

Usage

GGet *Form.Control.ImageAlign, var*

GSet *Form.Control.ImageAlign, value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

var Integer variable that will contain the value of the property.

value Integer expression for the new value of the property.

Values

1 – TopLeft

2 – TopCenter

3 – TopRight

4 – MiddleLeft

5 – MiddleCenter

6 – MiddleRight

7 – BottomLeft

8 – BottomCenter

9 – BottomRight

Default: 5 – MiddleCenter (Button, Label, RadioButton, CheckBox)

4 – MiddleLeft (LED)

See Also

Button, Label, RadioButton, Checkbox, LED, Image, TextAlign

Example

```
GSet frmMain.btnTools.ImageAlign, IMAGEALIGN_MIDDLECENTER
```

ImageOff Property

Applies To

LED

Description

Gets or sets the image that is displayed when LED control is off.

Usage

GGet *Form.Control.ImageOff, var*

GSet *Form.Control.ImageOff, value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

var String variable that will contain the value of the property.

value String expression for the new value of the property.

Values

A string containing the full path to an image file. The file extensions should be bmp, ico, jpeg, gif, wmf, or png.

Default: LedOff.ico

See Also

LED, ImageOn

Example

```
GSet frmMain.Led1.ImageOff, "c:\EpsonRC70\GUI\Icons\LedOff.ico"
```

ImageOn Property

Applies To

LED

Description

Gets or sets the image that is displayed when LED control is on.

Usage

GGet *Form.Control.ImageOn, var*

GSet *Form.Control.ImageOn, value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

var String variable that will contain the value of the property.

value String expression for the new value of the property.

Values

A string containing the full path to an image file. The file extensions should be bmp, ico, jpeg, gif, wmf, or png.

Default: LedRed.ico

See Also

LED, ImageOff

Example

```
GSet frmMain.Led1.ImageOn, "c:\EpsonRC70\GUI\Icons\LedRed.ico"
```


Interval Property

Applies To

Timer

Description

Gets or sets the time, in milliseconds, between timer ticks.

Usage

GGet *Form.Control.Interval, var*

GSet *Form.Control.Interval, value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

var Integer variable that will contain the value of the property.

value Integer expression for the new value of the property.

Values

The number of milliseconds between each timer tick. The integer value from 1 – 9999.

Default: 100

Remarks

To get the number of seconds in the interval, divide this number by 1,000.

See Also

Timer, Enabled

Example

```
GSet frmMain.tmrMain.Interval, 500
```

IOBit Property

Applies To

LED

Description

Gets or sets the number of the I/Obit that indicates it to the LED Control.

Usage

GGet *Form.Control.IOBit, var*

GSet *Form.Control.IOBit, value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

var Integer variable that will contain the value of the property.

value Integer expression for the new value of the property.

Values

The integer value from 0 to 9999

Default: 0

See Also

LED, IOType

Example

```
GSet frmMain.Led1.IOBit, 10
```

IOType Property

Applies To

LED

Description

Gets or sets the type of the I/O that indicates it to the LED Control.

Usage

GGet *Form.Control.IOType, var*

GSet *Form.Control.IOType, value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

var Integer variable that will contain the value of the property.

value Integer expression for the new value of the property.

Values

0 – Input

1 – Output

2 – Memory

Default: 0 – Input

See Also

LED, IOBit

Example

```
GSet frmMain.Led1.IOType, IOTYPE_OUTPUT
```

KeyPress Event

Applies To

TextBox

Description

Occurs when a key is pressed.

Usage

Form_Control_KeyPress (*Sender\$* As String, ByRef *Key\$* As String)

Sender\$ Name of the control that sent the event.

Key\$ The key that was pressed by the operator.

Remarks

The Keypress event can be used to detect the keys that are input by the operator. This event can be used as a filter. You can change the key that was pressed by setting *Key\$* to another character. You can cancel a keypress by setting *Key\$* to an empty string.

See Also

TextBox

Example

```
Function frmMain_txtSpeed_KeyPress(Sender$ As String, ByRef Key$ As String)
    ' Allow only digits to be entered
    If Instr("0123456789" Key$) < 0 Then
        Key$ = ""
    EndIf
End
```

LargeChange Property

Applies To

TrackBar

Description

Gets or sets the number of positions that the slider moves when clicking the mouse or pressing Page Up and Page Down keys.

Usage

GGet *Form.Control.LargeChange, var*

GSet *Form.Control.LargeChange, value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

var Integer variable that will contain the value of the property.

value Integer expression for the new value of the property.

Values

An integer representing the number of positions that the slider moves.

See Also

TrackBar, SmallChange

Example

```
GSet frmMain.TrackBar1.LargeChange, 10
```

Left Property

Applies To

Form, Button, Label, TextBox, RadioButton, CheckBox, ListBox, ComboBox, PictureBox, GroupBox, VideoBox, LED, ProgressBar, TrackBar, StatusBar, Grid

Description

Get or sets the left coordinate of a form or control in pixels.

Usage

GGet *Form*.[*Control*].Left, *var*

GSet *Form*.[*Control*].Left, *value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

var Integer variable that will contain the value of the property.

value Integer expression for the new value of the property.

Values

An integer representing the left coordinate in pixels.

See Also

Form, Button, Label, TextBox, RadioButton, Checkbox, ListBox, ComboBox, PictureBox, GroupBox, VideoBox, LED, ProgressBar, TrackBar, StatusBar, Top, Height, Width

Example

```
GSet frmMain.btnOK.Left, 200
```

List Property

Applies To

ListBox, ComboBox

Description

Get or sets the string value of the specified element in the control item list.

Usage

GGet *Form.Control.List(index), var*

GSet *Form.Control.List(index), value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name. The control must exist in the specified form.

index Integer expression for the list array index starting with 0.

var Integer variable that will contain the value of the property.

value String expression for the new value of the property.

Values

String containing the specified list item.

Remarks

After using AddItem to add items to the ListBox or ComboBox list, you can use the List property to get or edit the value of any of the items.

Setting a blank string, you can delete an item.

See Also

ComboBox, ListBox, ListCount, AddItem

Example

```
String part$  
GGet frmMain.lstPartNames.List(0), part$
```

ListCount Property

Applies To

ListBox, ComboBox

Description

Gets or sets the count of the number of items in a Listbox or Combobox.

Usage

GGet *Form.Control.ListCount*, *var*

GSet *Form.Control.ListCount*, *value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name. The control must exist in the specified form.

var Integer variable that will contain the value of the property.

value Integer expression for the new value of the property.

Values

The number of items in the list.

Remarks

To clear the items in a ListBox or ComboBox, you can set ListCount to 0. If ListCount is set to a value that is higher than the number of items in the list, then empty text is added for the extra items.

See Also

ComboBox, ListBox, AddItem, List

Example

```
Integer count

' Retrieve the number of items in a list
GGet frmMain.lstPartNames.ListCount, count

' Clear the items in a list
GSet frmMain.lstPartName.ListCount, 0
```


Load Event

Applies To

Form

Description

Occurs before a form is displayed for the first time.

Usage

Form_Load (*Sender\$* As String)

Sender\$ Name of the form that sent the event.

Remarks

You can use this event to perform tasks before a form is shown to the user.

See Also

Form, Resize, Closed

Example

```
Function frmMain_Load(Sender$ As String)

    GSet frmMain.txtSpeed.Text, Str$(g_RobotSpeed)
End
```

MaximizeBox Property

Applies To

Form

Description

Gets or sets a value indicating whether the maximize button is displayed in the title bar of the form.

Usage

GGet *Form*.**MaximizeBox**, *var*

GSet *Form*.**MaximizeBox**, *value*

Form Name of a form or string variable containing a form name.

var Boolean variable that will contain the value of the property.

value Boolean expression for the new value of the property.

Values

0 – False

1 – True

Default: 0 – False

Remarks

A maximize button enables users to maximize a form to full screen.

See Also

Form, MinimizeBox

Example

```
GSet frmMain.MaximizeBox, True
```

Maximum Property

Applies To

ProgressBar, TrackBar

Description

Get or sets the maximum value of the processing range of the control.

Usage

GGet *Form.Control.Maximum, var*

GSet *Form.Control.Maximum, value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.
The control must exist in the specified form.

var Integer variable that will contain the value of the property.

value String expression for the new value of the property.

Values

An integer representing the maximum value of the processing range.

See Also

ProgressBar, TrackBar, Minimum, Value

Example

```
GSet frmMain.TrackBar1.Maximum, 60
```

MinimizeBox Property

Applies To

Form

Description

Gets or sets a value indicating whether the minimize button is displayed in the title bar of the form.

Usage

GGet *Form.MinimizeBox, var*

GSet *Form.MinimizeBox, value*

Form Name of a form or string variable containing a form name.

var Boolean variable that will contain the value of the property.

value Boolean expression for the new value of the property.

Values

0 – False

1 – True

Default: 0 – False

Remarks

A minimize button enables users to minimize a form to an icon.

See Also

Form, MaximizeBox

Example

```
GSet frmMain.MinimizeBox, True
```

Minimum Property

Applies To

ProgressBar, TrackBar

Description

Get or sets the minimum value of the processing range of the control.

Usage

GGet *Form.Control.Minimum, var*

GSet *Form.Control.Minimum, value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.
The control must exist in the specified form.

var Integer variable that will contain the value of the property.

value String expression for the new value of the property.

Values

An integer representing the minimum value of the processing range.

See Also

ProgressBar, TrackBar, Maximum, Value

Example

```
GSet frmMain.TrackBar1.Minimum, 10
```

MultiLine Property

Applies To

TextBox

Description

Gets or sets a value indicating whether this is a multiline TextBox control.

Usage

GGet *Form.Control.MultiLine*, *var*

GSet *Form.Control.MultiLine*, *value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name. The control must exist in the specified form.

var Boolean variable that will contain the value of the property.

value Boolean expression for the new value of the property.

Values

0 – False

1 – True

Default: 0 – False

Remarks

If you want to display multiple lines in a TextBox control, you must set **MultiLine** to 1 – True.

See Also

TextBox, ScrollBars

Example

```
GSet frmMain.txtStatus.MultiLine, True
```

Name Property

Applies To

Form, Button, Label, TextBox, RadioButton, CheckBox, ListBox, ComboBox, PictureBox, GroupBox, Timer, VideoBox, LED, ProgressBar, TrackBar, StatusBar, Grid

Description

Gets the name of a form or control at runtime. Used to set the Name of a form or control at design time.

Usage

GGet *Form*.[*Control*].Name, *var*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

var String variable that will contain the value of the property.

Values

A string containing the name of the form or control.

See Also

Form, Button, Label, TextBox, RadioButton, Checkbox, ListBox, ComboBox, PictureBox, GroupBox, Timer, VideoBox, LED, ProgressBar, TrackBar, StatusBar

Example

```
String name$  
GGet frmMain.btnOK.Name, name$
```

Orientation Property

Applies To

ProgressBar, TrackBar

Description

Get or sets the orientation of the control.

Usage

GGet *Form.Control.Orientation, var*

GSet *Form.Control.Orientation, value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

var String variable that will contain the value of the property.

value String expression for the new value of the property.

Values

0 – Horizontal

1 – Vertical

Default: 0 – Horizontal

See Also

ProgressBar, TrackBar

Example

```
GSet frmMain.ProgressBar1.Orientation, ORIENT_VERTICAL
```


PasswordChar Property

Applies To

TextBox

Description

Gets or sets the character used to mask characters of a password in a single-line TextBox control.

Usage

GGet *Form.Control.PasswordChar*, *var*

GSet *Form.Control.PasswordChar*, *value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name. The control must exist in the specified form.

var String variable that will contain the value of the property.

value String expression for the new value of the property.

Values

A string containing the character used for the mask.

Remarks

Use **PasswordChar** to hide the characters of a password. When the user types a character, the **PasswordChar** is displayed. Note that the Multiline property for the TextBox control must be set to 0–False.

See Also

TextBox

Example

```
GSet frmMain.txtPassword.PasswordChar, "*"
```

ProgressBarStyle Property

Applies To

ProgressBar

Description

Get or sets the style of the ProgressBar.

Usage

GGet *Form.Control.ProgressBarStyle*, *var*

GSet *Form.Control.ProgressBarStyle*, *value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

var String variable that will contain the value of the property.

value String expression for the new value of the property.

Values

0 – Blocks

1 – Continuous

2 – Marquee

Default: 0 - Blocks

See Also

ProgressBar

Example

```
GSet frmMain.ProgressBar1.ProgressBarStyle, PROGRESSBAR_STYLE_MARQUEE
```

ReadOnly Property

Applies To

TextBox

Description

Gets or sets which the textbox control is ReadOnly or not.

Usage

GGet *Form.Control.ReadOnly, var*

GSet *Form.Control.ReadOnly, value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.
The control must exist in the specified form.

var Boolean variable that will contain the value of the property.

value Boolean expression for the new value of the property.

Values

0 – False

1 – True

Default 0 – False

Remarks

When this property is set to 1–True, Operator is not able to edit textbox.

See Also

TextBox

Example

```
GSet frmMain.txtSpeed.ReadOnly, True
```

RemoveRow Property

Applies To

Grid

Description

Used to remove a row from a Grid control during runtime.

Usage

GSet *Form.Control.RemoveRow, value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name. The control must exist in the specified form.

value Integer representing the index of the row being removed.

Values

An integer value containing the index of the removed row.

See Also

AddRow, Grid, RowCount

Example

```
GSet frmMain.Grid01.RemoveRow, 0
```

Resize Event

Applies To

Form

Description

Occurs when the form is resized.

Usage

Form_Resize (*Sender\$* As String)

Sender\$ Name of a form that sent the event.

See Also

Form, Load, Closed

Example

```
Function frmMain_Resize(Sender$ As String)
    Integer width

    GGet frmMain.Width, width
    GSet frmMain.btnOK.Left, width / 2 - 100
    GSet frmMain.btnCancel.Left, width / 2 + 10
End
```

RobotNumber Property

Applies To

StatusBar

Description

Get or sets the robot number to use when ShowRobot is True.

Usage

GGet *Form.Control.RobotNumber, var*

GSet *Form.Control.RobotNumber, value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.
The control must exist in the specified form.

var Integer variable that will contain the value of the property.

value Integer expression for the new value of the property.

Values

An integer that specifies the robot number used to display the robot information.

Default: 1

See Also

StatusBar, ShowRobot

Example

```
GSet frmMain.StatusBar1.RobotNumber, 2
```

RowCount Property

Applies To

Grid

Description

Used to set or get the number of rows in a Grid control.

If set to a value greater than the current number of lines, a new line will be added to the end. If set to a value less than the current number of lines, a new line will be removed from the end.

Usage

GGet *Form.Control.RowCount, var*

GSet *Form.Control.RowCount, value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name. The control must exist in the specified form.

var Integer variable that will contain the number of rows in the control.

value Integer representing the total number of rows in the control.

Values

Integer value specifying the number of rows in the Grid.

See Also

AddRow, Grid, RemoveRow, RowCount

Example

```
Integer count
GSet frmMain.Grid01.RowCount, 50
GGet frmMain.Grid01.RowCount, count
```

Scroll Event

Applies To

TrackBar

Description

Occurs when the track bar slider has been moved.

Usage

Form_Control_Scroll (*Sender\$* As String)

Sender\$ Name of the control that sent the event.

See Also

TrackBar

Example

```
Function frmMain_TrackBar1_Scroll(Sender$ As String, Value As Integer)
    Print "The trackbar value after scroll is", Value
End
```


ScrollBars Property

Applies To

TextBox, Grid

Description

Gets or sets which scroll bars should appear in a multiline TextBox control.

Usage

GGet *Form.Control.ScrollBars*, *var*

GSet *Form.Control.ScrollBars*, *value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name. The control must exist in the specified form.

var Integer variable that will contain the value of the property.

value Integer expression for the new value of the property.

Values

0 – None

1 – Horizontal

2 – Vertical

3 – Both

Default: 0 – None

Remarks

To use ScrollBars, the Multiline property for the TextBox control must be set to 1 – True.

To display the horizontal scroll bar, set WordWrap property to 0 – False.

See Also

TextBox, Multiline, WordWrap

Example

```
GSet frmMain.txtStatus.Scrollbars, SCROLLBARS_VERT
```

SelectedIndex Property

Applies To

ListBox, ComboBox, Grid

Description

Gets or sets the SelectedIndex property returns an index of the currently selected item

Usage

GGet *Form.Control.SelectedIndex, var*

GSet *Form.Control.SelectedIndex, value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name. The control must exist in the specified form.

var Integer variable that will contain the value of the property.

value Integer expression for the new value of the property.

Values

Returns the index of the selected item, starting with 0. -1 is returned if no items are selected.

Remarks

Use **SelectedIndex** to determine which item the user has selected in a ListBox or ComboBox. Typically, you would do this in the Click event of the control.

See Also

AddItem, ComboBox, List, ListBox, Grid

Example

```
Integer index  
GGet frmMain.lstParts.SelectedIndex, index
```

ShowDateTime Property

Applies To

StatusBar

Description

Gets or sets whether to display the current date and time on a StatusBar control.

Usage

GGet *Form.Control.ShowDateTime, var*

GSet *Form.Control.ShowDateTime, value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.
The control must exist in the specified form.

var Boolean variable that will contain the value of the property.

value Boolean expression for the new value of the property.

Values

0 – False

1 – True

Default: 0 – False

See Also

StatusBar, ShowEStop, ShowRobot, ShowSafeguard

Example

```
GSet frmMain.StatusBar1.ShowDateTime, True
```

ShowEStop Property

Applies To

StatusBar

Description

Gets or sets whether to display EStop status on a StatusBar control.

Usage

GGet *Form.Control.ShowEStop, var*

GSet *Form.Control.ShowEStop, value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.
The control must exist in the specified form.

var Boolean variable that will contain the value of the property.

value Boolean expression for the new value of the property.

Values

0 – False

1 – True

Default: 0 – False

See Also

StatusBar, ShowDateTime, ShowRobot, ShowSafeguard

Example

```
GSet frmMain.StatusBar1.ShowEStop, True
```

ShowPrint Property

Applies To

TextBox

Description

Gets or sets whether to display output from Print statements or not.

Usage

GGet *Form.Control.ShowPrint, var*

GSet *Form.Control.ShowPrint, value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name. The control must exist in the specified form.

var Boolean variable that will contain the value of the property.

value Boolean expression for the new value of the property.

Values

0 – False

1 – True

Default: 0 – False

Remarks

When ShowPrint is True, then all output from Print statements executed in Spel tasks will be displayed in the text box. If multiple text boxes have ShowPrint set to True, then all of the text boxes will show the print output.

See Also

TextBox, ScrollBars

Example

```
GSet frmMain.txtStatus.ShowPrint, True
```

ShowRobot Property

Applies To

StatusBar

Description

Get or sets whether to display the robot name and model that is specified by the RobotNumber property on a StatusBar control.

Usage

GGet *Form.Control.ShowRobot, var*

GSet *Form.Control.ShowRobot, value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.
The control must exist in the specified form.

var Boolean variable that will contain the value of the property.

value Boolean expression for the new value of the property.

Values

0 – False

1 – True

Default: 0 – False

See Also

StatusBar, ShowDateTime, ShowEStop, ShowSafeguard

Example

```
GSet frmMain.StatusBar1.ShowRobot, True
```

ShowSafeguard Property

Applies To

StatusBar

Description

Get or sets whether to display the Safeguard status on a StatusBar control.

Usage

GGet *Form.Control.ShowSafeguard, var*

GSet *Form.Control.ShowSafeguard, value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.
The control must exist in the specified form.

var Boolean variable that will contain the value of the property.

value Boolean expression for the new value of the property.

Values

0 – False

1 – True

Default: 0 – False

See Also

StatusBar, ShowDateTime, ShowEStop, ShowRobot

Example

```
GSet frmMain.StatusBar1.ShowSafeguard, True
```

SizeMode Property

Applies To

PictureBox

Description

Indicates how the image is displayed.

Usage

GGet *Form.Control.SizeMode*, *var*

GSet *Form.Control.SizeMode*, *value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name. The control must exist in the specified form.

var Integer variable that will contain the value of the property.

value Integer expression for the new value of the property.

Values

0 – Normal

1 – StretchImage

2 – AutoSize

3 – CenterImage

4 – Zoom

Default: 0 – Normal

Remarks

By default, in Normal mode, the image is placed in the upper left corner of the PictureBox, and any part of the image too big for the PictureBox is clipped. Using the StretchImage value causes the image to stretch to fit the PictureBox. Using the AutoSize value causes the control to resize to always fit the image. Using the CenterImage value causes the image to be centered in the PictureBox. Using the Zoom value causes the image to stretch to fit the PictureBox keeping the same aspect ratio.

See Also

PictureBox, Image, ImageAlign

Example

```
GSet frmMain.picLogo.SizeMode, SIZEMODE_AUTOSIZE
```


SmallChange Property

Applies To

TrackBar

Description

Gets or sets the number of positions that the slider moves for keyboard inputs (arrow orientation keys).

Usage

GGet *Form.Control.SmallChange, var*

GSet *Form.Control.SmallChange, value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

var Integer variable that will contain the value of the property.

value Integer expression for the new value of the property.

Values

An integer representing the number of positions that the slider moves.

See Also

TrackBar, LargeChange

Example

```
GSet frmMain.TrackBar1.SmallChange, 5
```

Sorted Property

Applies To

ComboBox, ListBox

Description

Gets or sets a value indicating whether the items in the ComboBox or ListBox are sorted alphabetically.

Sorting order: Numeric character (regardless of whether one-byte or two byte), alphabetical character, Katakana, Hiragana, Kanji character

Usage

GGet *Form.Control.Sorted*, *var*

GSet *Form.Control.Sorted*, *value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name. The control must exist in the specified form.

var Boolean variable that will contain the value of the property.

value Boolean expression for the new value of the property.

Values

0 – False

1 – True

Default: 0 – False

See Also

ComboBox, ListBox

Example

```
GSet frmMain.lstParts.Sorted, True
```

StartPosition Property

Applies To

Form

Description

Gets or sets the starting position of the form at run time.

Usage

GGet *Form.StartPosition, var*

GSet *Form.StartPosition, value*

Form Name of a form or string variable containing a form name.

var Integer variable that will contain the value of the property.

value Integer expression for the new value of the property.

Values

0 – Manual

1 – CenterScreen

2 – CenterParent

Default: 1 – CenterScreen

See Also

Form, WindowState

Example

```
GSet frmMain.StartPosition, STARTPOSITION_CENTERSCREEN
```

Step Property

Applies To

ProgressBar

Description

Gets or sets the amount to increment the current value of the progress bar as a percentage of the length of the progress indicator.

Usage

GGet *Form.Control.Step, var*

GSet *Form.Control.Step, value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

var Integer variable that will contain the value of the property.

value Integer expression for the new value of the property.

Values

An integer representing the amount to increment the current value.

See Also

ProgressBar

Example

```
GSet frmMain.ProgressBar1.Step, 5
```

TabIndex Property

Applies To

Button, Label, TextBox, RadioButton, CheckBox, ListBox, ComboBox, PictureBox, GroupBox, VideoBox, LED, ProgressBar, TrackBar, StatusBar, Grid

Description

Gets or sets the tab order of the control within its container.

Usage

GGet *Form.Control.TabIndex, var*

GSet *Form.Control.TabIndex, value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

var Integer variable that will contain the value of the property.

value Integer expression for the new value of the property.

Values

The index of the tab order of the control.

See Also

Button, Label, TextBox, RadioButton, Checkbox, ListBox, ComboBox, PictureBox, GroupBox, VideoBox, LED, ProgressBar, TrackBar, StatusBar

Example

```
GSet frmMain.txtStatus.TabIndex, 3
```

Text Property

Applies To

Form, Button, Label, TextBox, RadioButton, CheckBox, ComboBox, GroupBox, LED, StatusBar

Description

Gets or sets the text associated with the control.

Usage

GGet *Form*.**[Control].Text**, *var*

GSet *Form*.**[Control].Text**, *value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

var String variable that will contain the value of the property.

value String expression for the new value of the property.

Values

A string containing the text of the form or control.

See Also

Form, Button, Label, TextBox, RadioButton, Checkbox, ComboBox, GroupBox, LED, StatusBar, TextAlign

Example

```
GSet frmMain.lblName.Text, "Name: "
```

TextAlign Property

Applies To

Button, Label, TextBox, RadioButton, CheckBox, LED

Description

Gets or sets the alignment of text in the control.

Usage

GGet *Form.Control.TextAlign*, *var*

GSet *Form.Control.TextAlign*, *value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

var Integer variable that will contain the value of the property.

value Integer expression for the new value of the property.

Values

For Button, Label, RadioButton, CheckBox controls

1 – TopLeft

2 – TopCenter

3 – TopRight

4 – MiddleLeft

5 – MiddleCenter

6 – MiddleRight

7 – BottomLeft

8 – BottomCenter

9 – BottomRight

Default : 1 – TopLeft (Label 1)

4 – MiddleLeft (RadioButton, CheckBox)

5 – MiddleCenter (Button)

6 – MiddleRight (LED)

For TextBox

1 – Left

2 – Center

3 – Right

Default: 1 – Left

See Also

Button, Label, TextBox, RadioButton, Checkbox, LED, Text

Example

```
GSet frmMain.lblName.TextAlign, TEXTALIGN_LEFT
```

Tick Event

Applies To

Timer

Description

Occurs when a Timer control reaches its Interval value.

Usage

Form_Control_Tick (*Sender\$* As String)

Sender\$ Name of a control that sent the event.

See Also

Timer, Interval, Enabled

Example

```
Function frmMain_Timer1_Tick(Sender$ As String)

    GSet frmMain.lblDateTime.Text, Date$ + " " + Time$
End
```


TickFrequency Property

Applies To

TrackBar

Description

Gets or sets the interval of the tick marks on a TrackBar control.

Usage

GGet *Form.Control.TickFrequency, var*

GSet *Form.Control.TickFrequency, value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

var Integer variable that will contain the value of the property.

value Integer expression for the new value of the property.

Values

An integer representing the interval of the tick marks.

See Also

TrackBar

Example

```
GSet frmMain.TrackBar1.TickFrequency, 5
```

TickStyle Property

Applies To

TrackBar

Description

Gets or sets where to display the tick marks on a TrackBar control.

Usage

GGet *Form.Control.TickStyle, var*

GSet *Form.Control.TickStyle, value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

var Integer variable that will contain the value of the property.

value Integer expression for the new value of the property.

Values

0 – None

1 – TopLeft

2 – BottomRight

3 – Both

Default: 2 - BottomRight

See Also

TrackBar

Example

```
GSet frmMain.TrackBar1.TickStyle, TICKSTYLE_BOTH
```

ToolTipText Property

Applies To

Button, Label, TextBox, RadioButton, CheckBox, ListBox, ComboBox, PictureBox, GroupBox, VideoBox, LED, ProgressBar, TrackBar, StatusBar, Grid

Description

Used to show a small rectangular pop-up window that displays a brief description of a control's purpose when the user rests the mouse pointer over the control.

Usage

GGet *Form.Control.ToolTipText, var*

GSet *Form.Control.ToolTipText, value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

var String variable that will contain the value of the property.

value String expression for the new value of the property.

Values

A string containing the tool tip text of the control.

Default: Empty string

See Also

Button, Label, TextBox, RadioButton, Checkbox, ListBox, ComboBox, PictureBox, GroupBox, VideoBox, LED, ProgressBar, StatusBar, TrackBar

Example

```
GSet frmMain.btnStart.ToolTipText, "Click Here to Start"
```

Top Property

Applies To

Form, Button, Label, TextBox, RadioButton, CheckBox, ListBox, ComboBox, PictureBox, GroupBox, VideoBox, LED, ProgressBar, TrackBar, StatusBar, Grid

Description

Get or sets the top coordinate of a form or control in pixels.

Usage

GGet *Form*.*[Control]*.**Top**, *var*

GSet *Form*.*[Control]*.**Top**, *value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

var Integer variable that will contain the value of the property.

value Integer expression for the new value of the property.

Values

An integer representing the top coordinate in pixels.

See Also

Form, Button, Label, TextBox, RadioButton, Checkbox, ListBox, ComboBox, PictureBox, GroupBox, VideoBox, LED, ProgressBar, TrackBar, StatusBar, Left, Height, Width

Example

```
GSet frmMain.txtStatus.Top, 200
```

Type Property

Applies To

All Controls

Description

Gets the type name of a control.

Usage

GGet *Form.Control.Type, var*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

var String variable that will contain the value of the property.

Values

A string containing the name of the type of the control.

See Also

Controls

Example

```
GGet frmMain.Controls(index).Type, typeName$
```

Update Property

Applies To

TextBox

Description

Gets or sets if the value of textbox is updated automatically or not when it is set to display the global variable.

Usage

GGet *Form.Control.Update*, *var*

GSet *Form.Control.Update*, *value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

var Boolean variable that will contain the value of the property.

value Boolean expression for the new value of the property.

Values

0 – False

1 – True

Default: 1 – True

Remarks

To show a SPEL⁺ global variable on a textbox, set the global variable name in the Variable property. If the Update property is set to 0–False, the global variable value is not updated.

When you set the TextBox Variable property to a global variable, by default RC+ automatically updates the TextBox Text value with the value of the variable at runtime. The Update property default value is True. If you want to allow a user to change the value of the same variable, you must set Update to False. This stops the auto update so the user can type in a new value. When Update is set from False to True, RC+ sets the value of the variable to the new value entered by the user in the TextBox. One method is to add a CheckBox above the TextBox called “Change Value” or some similar name. In the CheckkBox Click event, use GGet to get the checked state of the CheckBox and then use GSset to set the TextBox Update property. When the box is checked, set Update to False.

See Also

TextBox, Variable

Example

```
GSet frmMain.txtStatus.Update, False
```

Value Property

Applies To

ProgressBar, TrackBar

Description

Gets or sets the value that represents the control's current position.

Usage

GGet *Form.Control.Value*, *var*

GSet *Form.Control.Value*, *value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.
The control must exist in the specified form.

var String variable that will contain the value of the property.

value String expression for the new value of the property.

Values

An integer representing the current value.

See Also

ProgressBar, TrackBar, Maximum, Minimum, Variable

Example

```
GSet form1.ProgressBar1.Value, 75
```

Variable Property

Applies To

TextBox, ProgressBar, TrackBar

Description

Gets or sets the name of a SPEL⁺ global variable used for the textbox display.

Usage

GGet *Form.Control.Variable*, *var*

GSet *Form.Control.Variable*, *value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name. The control must exist in the specified form.

var String variable that will contain the value of the property.

value String expression for the new value of the property.

Values

The name of a SPEL⁺ global variable in the current project.

Default: None

Remarks

When the Variable property is set to a SPEL⁺ global variable, then the Text value is automatically updated at runtime to show the value of the variable.

When you set the TextBox Variable property to a global variable, by default RC+ automatically updates the TextBox Text value with the value of the variable at runtime. The Update property default value is True. If you want to allow a user to change the value of the same variable, you must set Update to False. This stops the auto update so the user can type in a new value. When Update is set from False to True, RC+ sets the value of the variable to the new value entered by the user in the TextBox. One method is to add a CheckBox above the TextBox called "Change Value" or some similar name. In the CheckBox Click event, use GGet to get the checked state of the CheckBox and then use GSet to set the TextBox Update property. When the box is checked, set Update to False.

When you set the ProgressBar Variable property to a global variable, the progress bar will display the value of the variable.

When you set the TrackBar Variable property to a global variable, the variable value is set by the track bar.

See Also

TextBox, ProgressBar, TrackBar, Value

Example

```
GSet frmMain.txtStatus.Variable, "g_Status$"
```


VideoEnabled Property

Applies To

VideoBox

Description

Gets or sets whether the VideoBox displays video or not.

Usage

GGet *Form.Control.VideoEnabled, var*

GSet *Form.Control.VideoEnabled, value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

var Boolean variable that will contain the value of the property.

value Boolean expression for the new value of the property.

Values

0 – False

1 – True

Default: 0 – False

See Also

VideoBox, GraphicsEnabled

Example

```
GSet frmMain.VideoBox1.VideoEnabled, True
```

Visible Property

Applies To

Button, Label, TextBox, RadioButton, CheckBox, ListBox, ComboBox, PictureBox, GroupBox, VideoBox, LED, ProgressBar, StatusBar, TrackBar, Grid

Description

Gets or sets a value indicating whether the control is displayed at runtime.

Usage

GGet *Form.Control.Visible*, *var*

GSet *Form.Control.Visible*, *value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

var Boolean variable that will contain the value of the property.

value Boolean expression for the new value of the property.

Values

1 – True Display the control

0 – False Don't display the control

Default: 1 – True

Remarks

If **GGet** is executed without loading a form by **GShow** or **GShowDialog**, the return value will be **False**.

See Also

Button, Label, TextBox, RadioButton, Checkbox, ListBox, ComboBox, PictureBox, GroupBox, VideoBox, LED, ProgressBar, StatusBar, TrackBar, Enabled

Example

```
GSet frmMain.txtStatus.Visible, True
```

Width Property

Applies To

Form, Button, Label, TextBox, RadioButton, CheckBox, ListBox, ComboBox, PictureBox, GroupBox1, VideoBox, LED, ProgressBar, TrackBar, StatusBar, Grid

Description

Get or sets the width of a form or control in pixels.

Usage

GGet *Form*.[*Control*].**Width**, *var*

GSet *Form*.[*Control*].**Width**, *value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name.

var Integer variable that will contain the value of the property.

value Integer expression for the new value of the property.

Values

An integer representing the width in pixels.

See Also

Form, Button, Label, TextBox, RadioButton, CheckBox, ListBox, ComboBox, PictureBox, GroupBox, VideoBox, LED, ProgressBar, TrackBar, StatusBar, Left, Top, Height

Example

```
GSet frmMain.txtStatus.Width, 300
```

WindowState Property

Applies To

Form

Description

Gets or sets the form's window state.

Usage

GGet *Form.WindowState, var*

GSet *Form.WindowState, value*

Form Name of a form or string variable containing a form name.

var Integer variable that will contain the value of the property.

value Integer expression for the new value of the property.

Values

0 – Normal

1 – Minimized

2 – Maximized

Default: 0 – Normal

See Also

Form

Example

```
GSet frmMain.WindowState, WINDOWSTATE_MAXIMIZED
```

WordWrap Property

Applies To

TextBox

Description

Indicates whether a multiline text box control automatically wraps words to the beginning of the next line when necessary.

Usage

GGet *Form.Control.WordWrap*, *var*

GSet *Form.Control.WordWrap*, *value*

Form Name of a form or string variable containing a form name.

Control Name of a control or string variable containing a control name. The control must exist in the specified form.

var Boolean variable that will contain the value of the property.

value Boolean expression for the new value of the property.

Values

1 – True : The multiline text box control wraps words

0 – False : The text box control automatically scrolls horizontally when the user types past the right edge of the control.

Default : 1 – True

See Also

TextBox, Multiline, ScrollBars

Example

```
GSet frmMain.txtStatus.WordWrap, True
```

